


Designed for Edges and Corners



- ✓ **Tightens by Hand (No Tools Required)**
- ✓ **Supports Tile Thickness: 1/8" to 25/32" (3mm to 20 mm)**
- ✓ **Level and Space at The Same Time**
- ✓ **Minimum Joint Calibration: 3/64" (1 mm)**
- ✓ **Ideal for Both Floor and Wall Tiling**
- ✓ **Proprietary Scratch-Prevention Edge**
- ✓ **Built-in Spacer Calibration: 5/64" (2mm), 1/8" (3mm) & 5/32" (4mm)**
- ✓ **Color Coded Base Screws for Easy Size/Type Identification**
- ✓ **Cap Can Be Re-used More Than 500 Times**
(compared to others which may only be 8 to 10 times)
- ✓ **Compatible With Many Older-Generation Systems**

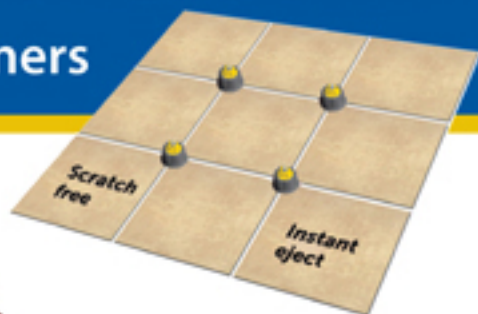