

## High-quality Mixing Paddles with Hex Shank



### New! 1/2" Hex Shank Fits Standard Drill Chucks

#### Mix with the best paddles!

CS Unitec's high-quality, heavy-duty galvanized steel mixing paddles are also available with a new hex shank design. The 1/2" hex shank provides a universal fit for traditional drills with 3-jaw chucks.






#### Thread Connection:

1/2" hex shank

#### Paddle Length:

All paddles are 24" long



Low Viscosity	Medium Viscosity	High Viscosity	Fold & Stir	Overlays, Underlays and Colored Products
 <p><b>RG 120 H</b> 4.5" dia.</p>	 <p><b>WG 120 H</b> 4.5" dia.</p> <p><b>WG 135 H</b> 5.4" dia.</p> <p><b>WG 160 H</b> 6.25" dia.</p>	 <p><b>MG 120 H</b> 4.5" dia.</p> <p><b>MG 140 H</b> 5.6" dia.</p> <p><b>MG 160 H</b> 6.25" dia.</p>	 <p><b>MH 240 H</b> 9.625" x 6.25"</p>	 <p><b>PWP 120</b> 4.75" dia.</p>

## Portable Mixing Stands

Save Time by Running Mixers Independently

### Model 25GP-WD


Designed for easy setup, with no clamping required. Has rear wheels for extra portability. Ideal for use with 5-gallon pails and CS Unitec's EHR 20.1 R, EHR 23/1.3 R or EZR 22 R/RL mixers, as well as all CS Unitec pneumatic mixers.



Size: H-35"  
L-26"  
W-14"  
Weight: 64 lbs.

### Model RST 91

Has an adjustable swing arm and variable height adjustment, allowing use with various pail sizes. Easy set up. Use with EHR 20.1 R, EHR 23/1.3 R or EZR 22 R/RL electric mixers and all pneumatic mixers.

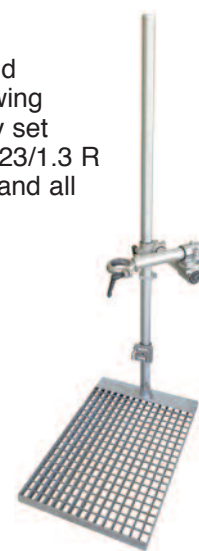

Size: H-65"  
L-28"  
W-20"  
Weight: 69 lbs.

## Pneumatic-powered Mixers for Hazardous Environments



Three air-powered models are inherently safer for mixing paint, glue, epoxy, mortar, concrete, refractory cement and other materials in shipyards and the oil and gas industries. They can be used around water with no fear of shock or blown circuitry.

**The MEGA HIPPO portable mixing station is also available with a pneumatic motor. See pages 6-7.**

Model No.	Power	CFM @ 90 PSI	Load Speed (RPM)	Mixing Capacity	Weight	Air Connection	Suitable Paddles
7 1111 0010	1.5 HP	49 CFM	0-440	110 lbs.	14 lbs.	3/8"	MG 140, WG 135
7 1112 0010	1.5 HP	49 CFM	0-190 / 0-350	110 lbs.	15 lbs.	3/8"	MG 140, WG 135
7 1113 0010	2.2 HP	67 CFM	0-190 / 0-420	200 lbs.	23 lbs.	3/4"	MG 160, WG 160

