
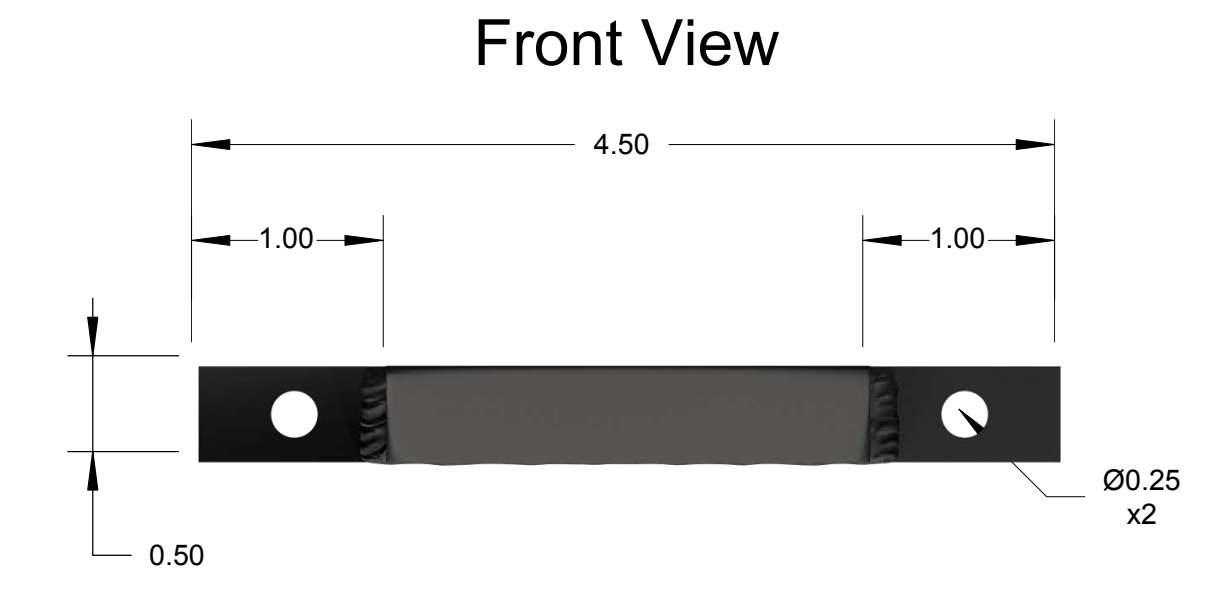
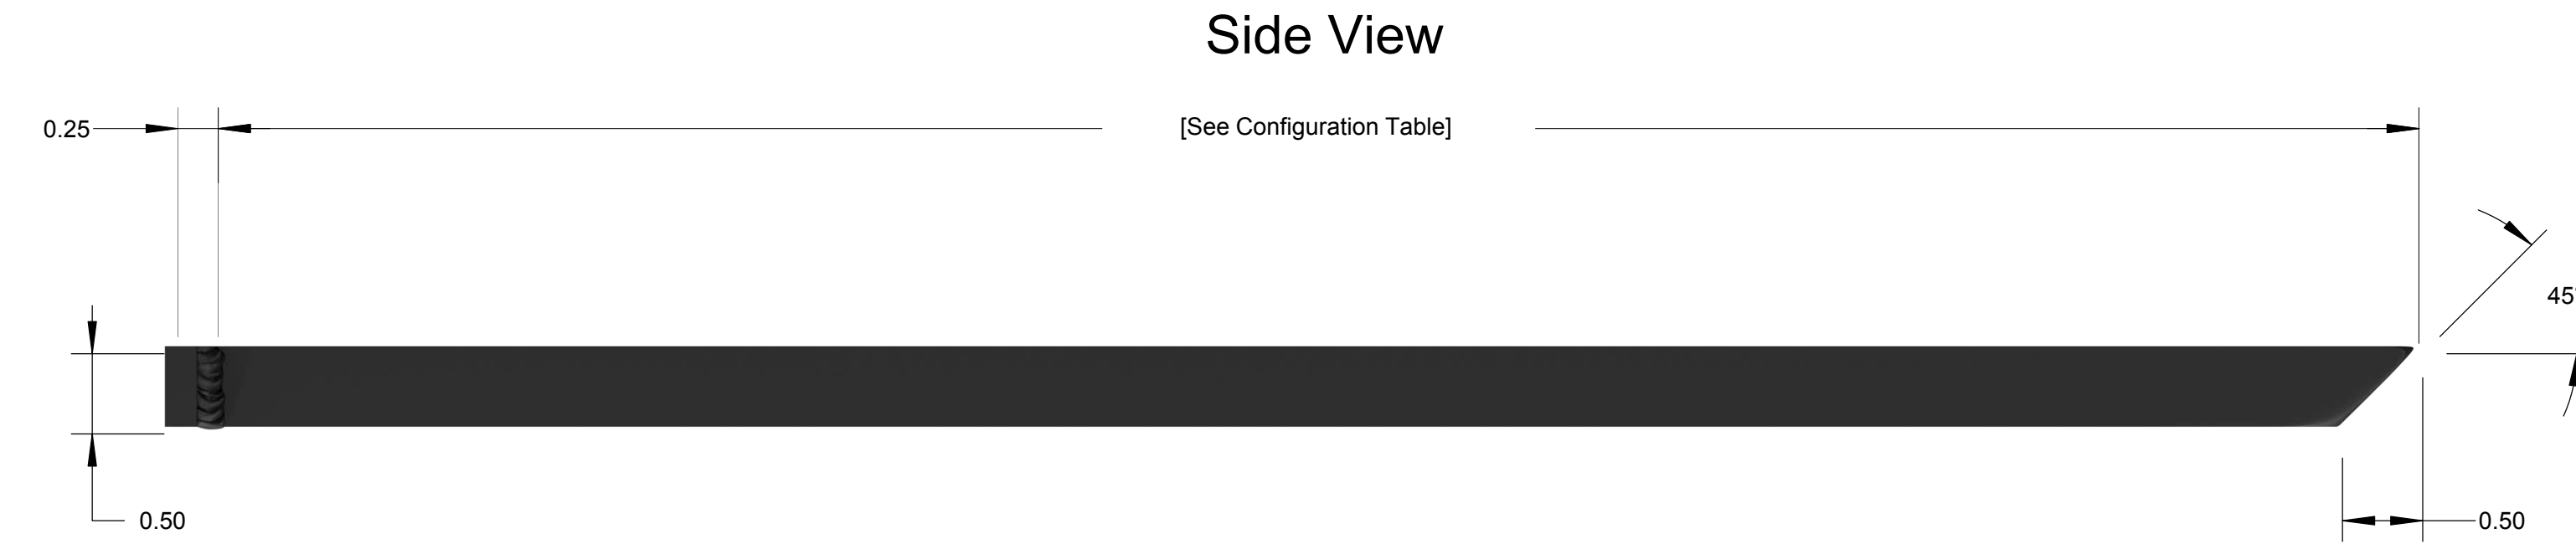
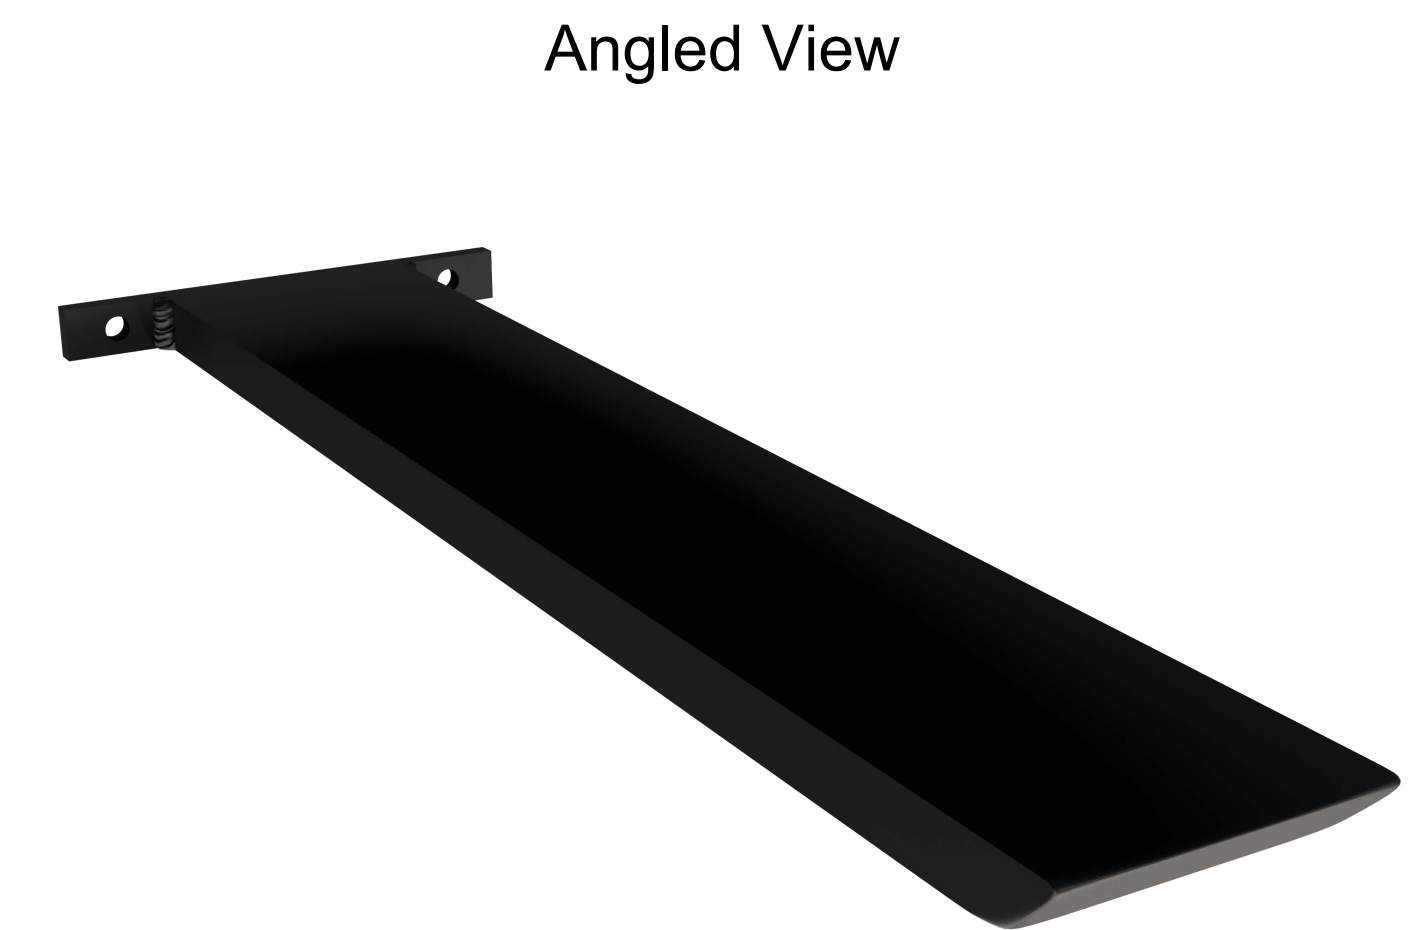


- NOTES: UNLESS OTHERWISE SPECIFIED
1. ALL DIMENSIONS ARE THEORETICALLY SHARP.
  2. REMOVE BURRS AND BREAK ALL SHARP EDGES .03 MAX.
  3. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE STATED.
  4. PARTS SHALL BE FREE OF GREASE AND CUTTING FLUID.
  5. COATED WITH BLACK RUST INHIBITOR FINISH.

REVISION STATUS - EACH SHEET IS MARKED WITH ITS REVISION				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A		01/07/20	

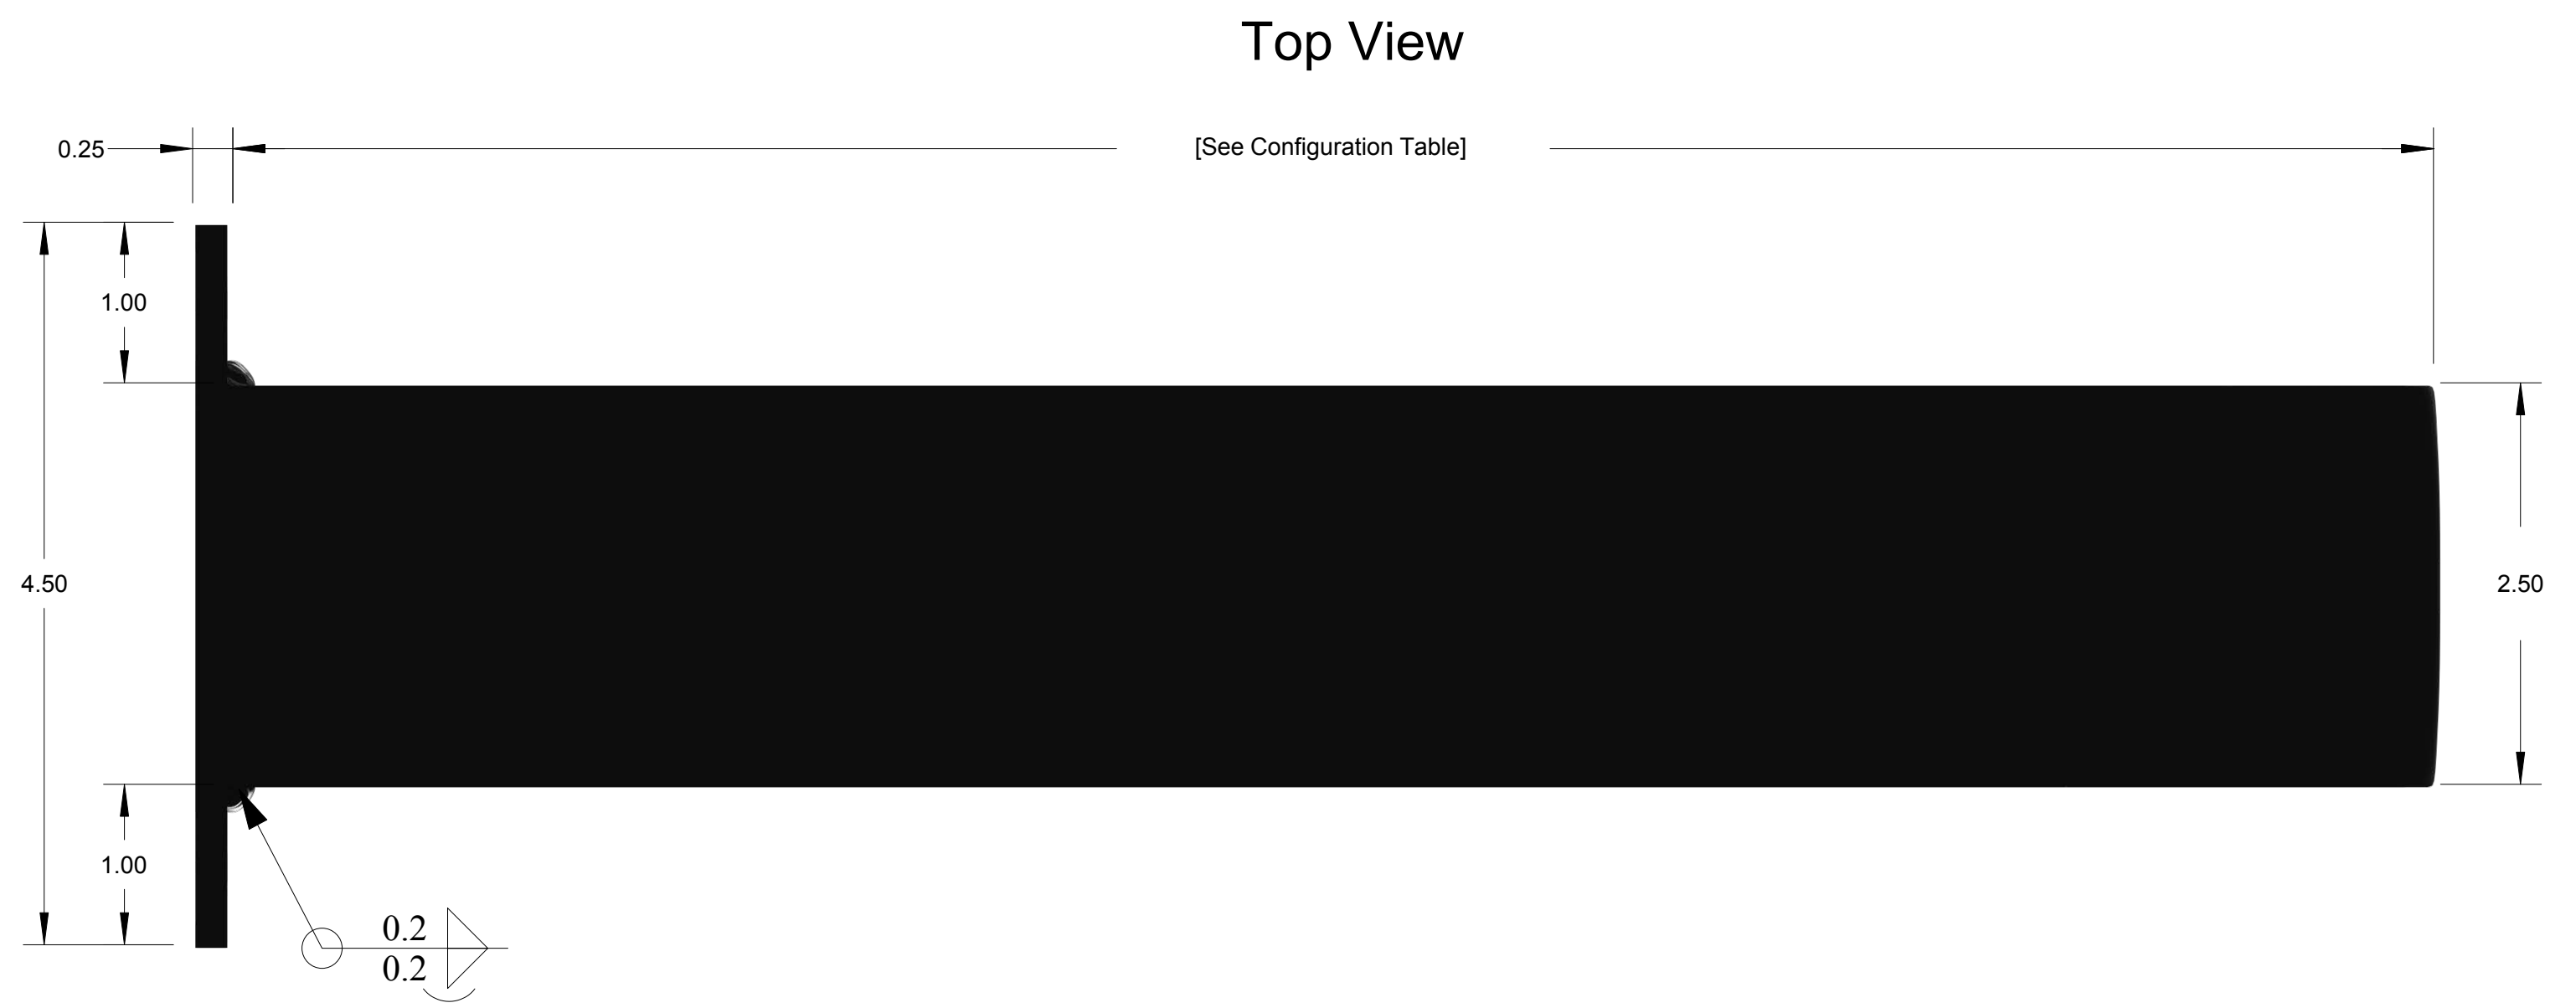

Configuration Table	
Model	Length
IS-14	14"
IS-16	16"
IS-18	18"
IS-20	20"
IS-22	22"
IS-24	24"
IS-26	26"
IS-28	28"
IS-30	30"
IS-32	32"
IS-34	34"
IS-36	36"
IS-38	38"
IS-40	40"
IS-42	42"
IS-44	44"
IS-46	46"
IS-48	48"
IS-50	50"
IS-52	52"
IS-54	54"

**APPROVED**

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: ANGLES .XX = .01    XX' = 1" .XXX = .005	ENGINEER ENGINEER ENGINEER CHECKED DRAWN SMR 01/07/21 MANAGER APPROVAL	
	INTERPRET DRAWINGS IN ACCORDANCE WITH: ASME Y14.100 ENGINEERING DRAWING PRACTICES ASME Y14.38 ABBREVIATIONS ASME Y14.5 DIMENSIONING AND TOLERANCING ASME Y14.6 SCREW THREAD REPRESENTATION AWS A2.4 WELDING SYMBOLS IEEE STD 315 SYMBOLS FOR ELECTRICAL AND ELECTRONIC DIAGRAMS	THE INFORMATION ON THIS DRAWING IS PROPRIETARY AND SHALL NOT BE DISCLOSED, USED OR DUPLICATED FOR PROCUREMENT OR MANUFACTURING PURPOSES WITHOUT THE EXPRESS WRITTEN CONSENT OF THE ORIGINAL GRANITE BRACKET.