

ATRIUM LIFT

Series IM R 13

STANDARD EQUIPMENT

- Automatic outrigger leveling system
- 360° rotation (not continuous)
- Emergency hand pump
- Cylinder holding valve
- Hour meter
- Load and tip detection sensor
- Load cell
- Hydraulic jib
- Rubber tracks
- 230V - 16 120V - 16 A electric motor for indoor use
- Air / Water outlet in the platform basket
- AC power to platform
- Removable wired control box
- Wired control
- GX390 Honda Engine
- Three travel speeds
- Remote battery charger
- Removable basket with 1 pin detach
- Overload sensor
- 120V battery charger
- Proportional controls with diagnostics

OPTIONAL EQUIPMENT

- 12 V emergency pump
- Hydraulically adjustable tracks width
- Non-marking rubber tracks
- Oversized 14" outrigger pads
- Wireless radio remote control box
- Working light in the platform basket

Portable / removable wired control box allows operation on ground level

Electro-hydraulic controls: efficiency and safety for the operators


Compact overall sizes and reduced stabilization footprint

Load and tip detection sensor for maximum safety and performance

360°

360° rotation (not continuous): outstanding aerial accessibility in any work situation

42' (13 m)
working height

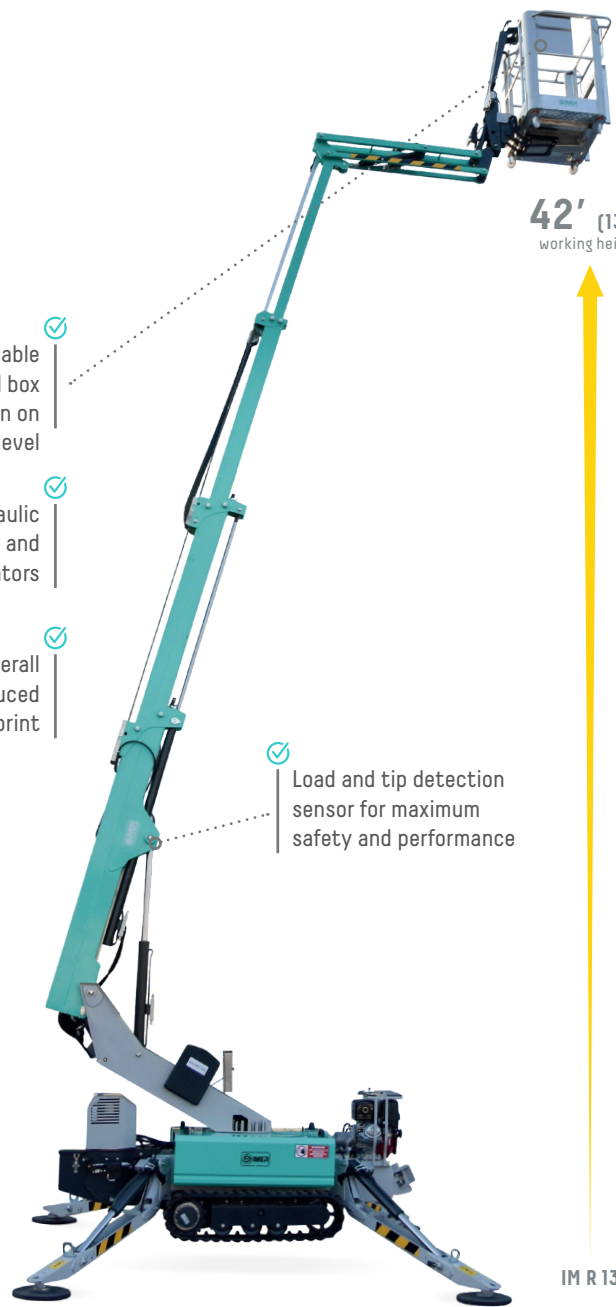

OUTDOOR AND INDOOR USE

	IM R 13			
		Metric		US
Working height	m	13	ft	42' 6"
Platform height	m	11	ft	36
Side outreach	m / kg	5.25 / 230 - 6.3 / 140	ft / lb	17' / 510 - 20' 6" / 308
Rotation (not continuous)	deg	360°	deg	360°
Basket dimensions	mm	1300 x 750 x 1100	in	51" x 28" x 43"
Transport length (without basket)	mm	3780 / 3000	ft	12' 4" / 9' 8"
Transport width (without basket)	mm	1400 / 790	ft	4' 6" / 2' 6"
Height in stowed position (w/ stabilizers in position)	mm	2000	ft	6' 6¾"
Overall outrigger footprint	mm	2700 x 2800	ft	8' 8" / 9' 2"
Driving speed	km/h	1.5	mph	1
Gradeability	deg / %	17° (30%)	%	30°
Platform capacity	kg	230	lb	507
Electric pump	V / kW	230 / 2.2	V / HP	230 / 2.95
Gas motor		Honda GX390 - 11 HP 3600 rpm		Honda GX390 - 11 HP 3600 rpm
Total weight of the machine	kg	1495*	lb	3296

*1550 kg with hydraulically adjustable tracks



User-friendly control panel with external support to the basket. More space available in the basket.




Compactness of the jib assembly hosting the load cell and basket quick mounting system



Magneto-thermic switch panel and power line inlet



Ground control panel easy to access and protected inside frame guards.

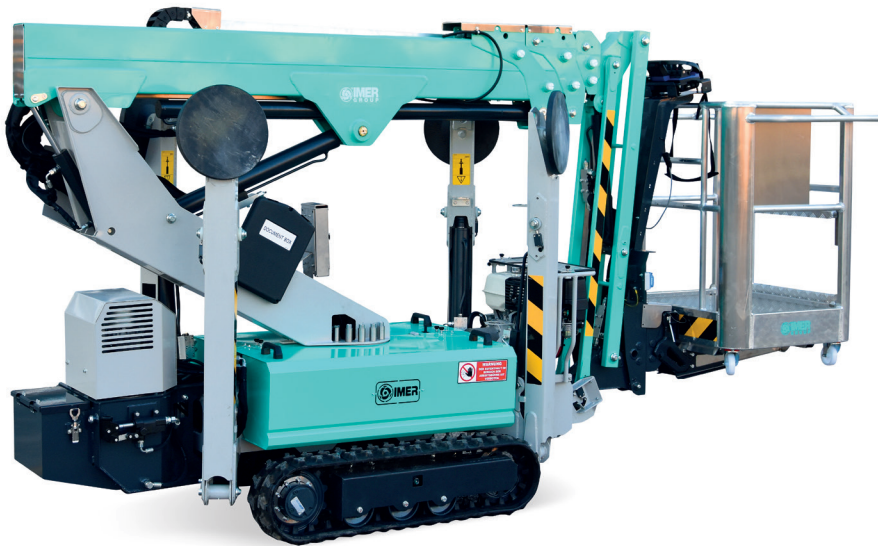

Compact dimensions for enhanced accessibility in any working site.

