

STEP-UP 120a

Hi-production screw pump for self-levelling and grouts

APPLICATIONS

For pumping gypsum or cement based self-levelling screeds, non-shrink grouts and repair mortars.

60 Hz
STEP-UP 120a
 220V/60Hz 3 phase
 Model # 1106094



✓ High flow rate
9.5 cubic yards per hour!

✓ 10 HP, 220V high torque 3 phase motor, pump very fast and very far


✓ High capacity hopper fitted with vibrating grate

✓ Torsion bar suspension for smooth towing

✓ Narrow width for getting through standard commercial doorways

✓ High flow 60.12 rotor and stator

CONTROL PANEL

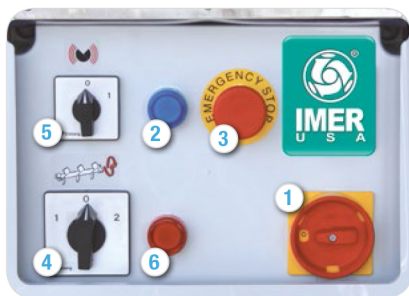

- 1 On/Off switch
- 2 Current supply light
- 3 Emergency stop button
- 4 Rotor/stator forward/reverse
- 5 Vibrating grate switch
- 6 Safety default light

Grouts or self-consolidating concretes - 3/8"

- ✓ 1107149 IM25L rotor/stator kit with mounting hardware



Self-levelling and fine grouts

- ✓ 1107533 Additional length of 50mm (2") x 33' hoses

Standard Equipment

- ✓ Three-phase 220V/60Hz motor – 10 HP
- ✓ Electric control panel
- ✓ Built-in low voltage electric remote control with 120' of cable
- ✓ 66' three phase power supply cord
- ✓ 60.12 high performance rotor-stator
- ✓ Vibrating grid
- ✓ 100' of hose (3 x 33') Ø 50 mm (2")
- ✓ Accessory box

Power	-	220V/60Hz, 3 phase
Motor power rating	HP	10
Max aggregate size std. rotor - stator	In.	5/16"
Flow rate	CY/h	9.5
Max pumping distance	Ft.	200
Max pumping height	Ft.	100
Hopper capacity	CF	4.25
Dimensions length/width/height	In.	91/32/38
Weight	Lbs.	616
Sound pressure level	dB (A)	< 79

* The pumping distance may vary depending on: the type of material used, pumping height, material consistency, type of pump installed.

Recommended accessories for