
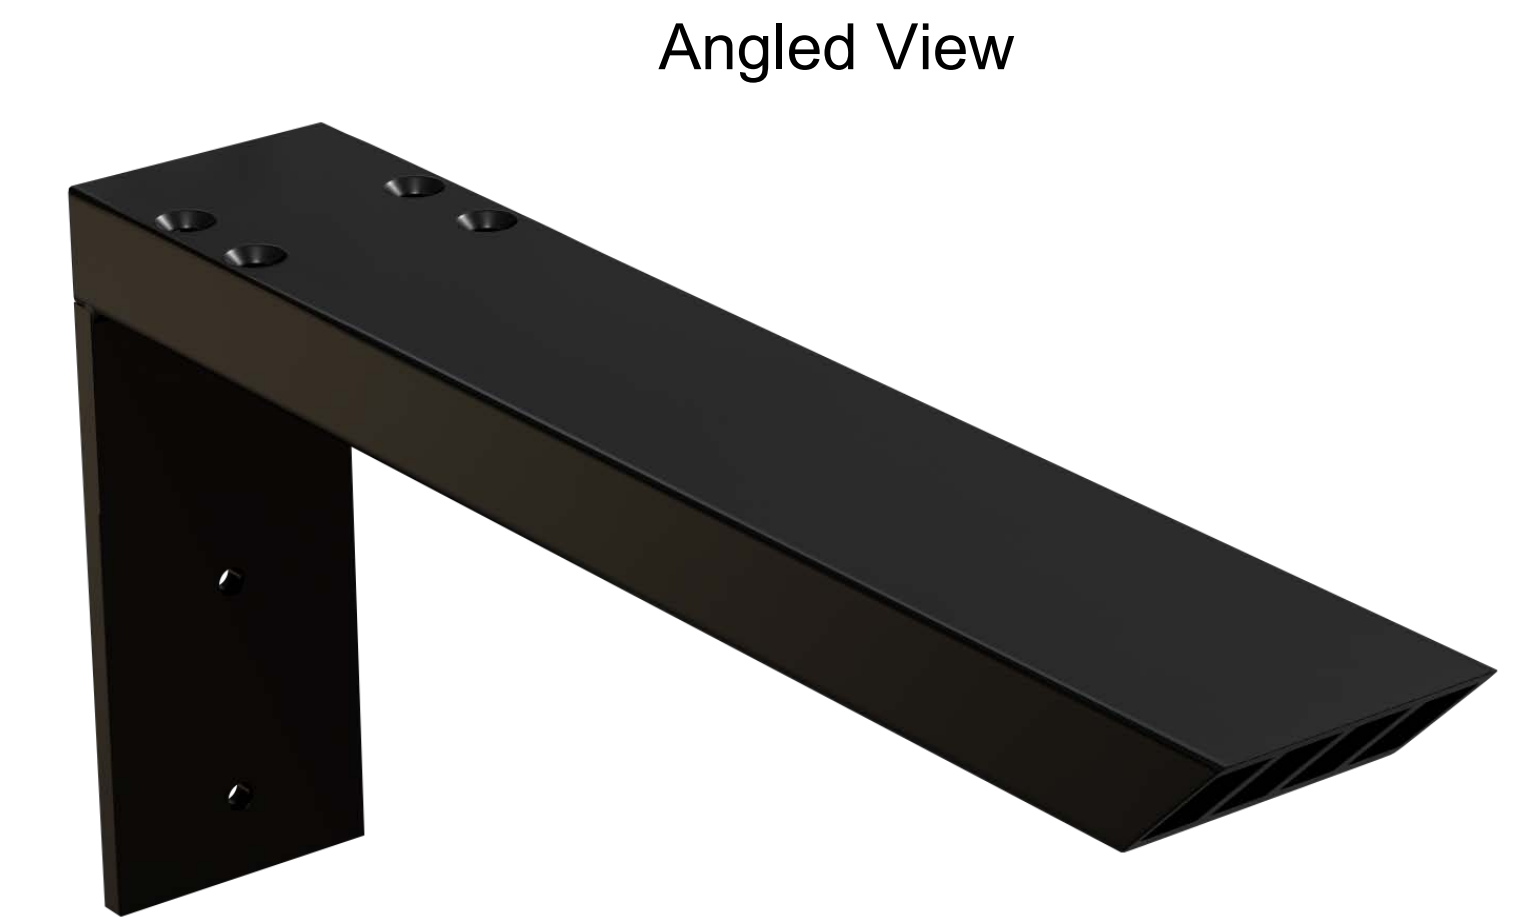
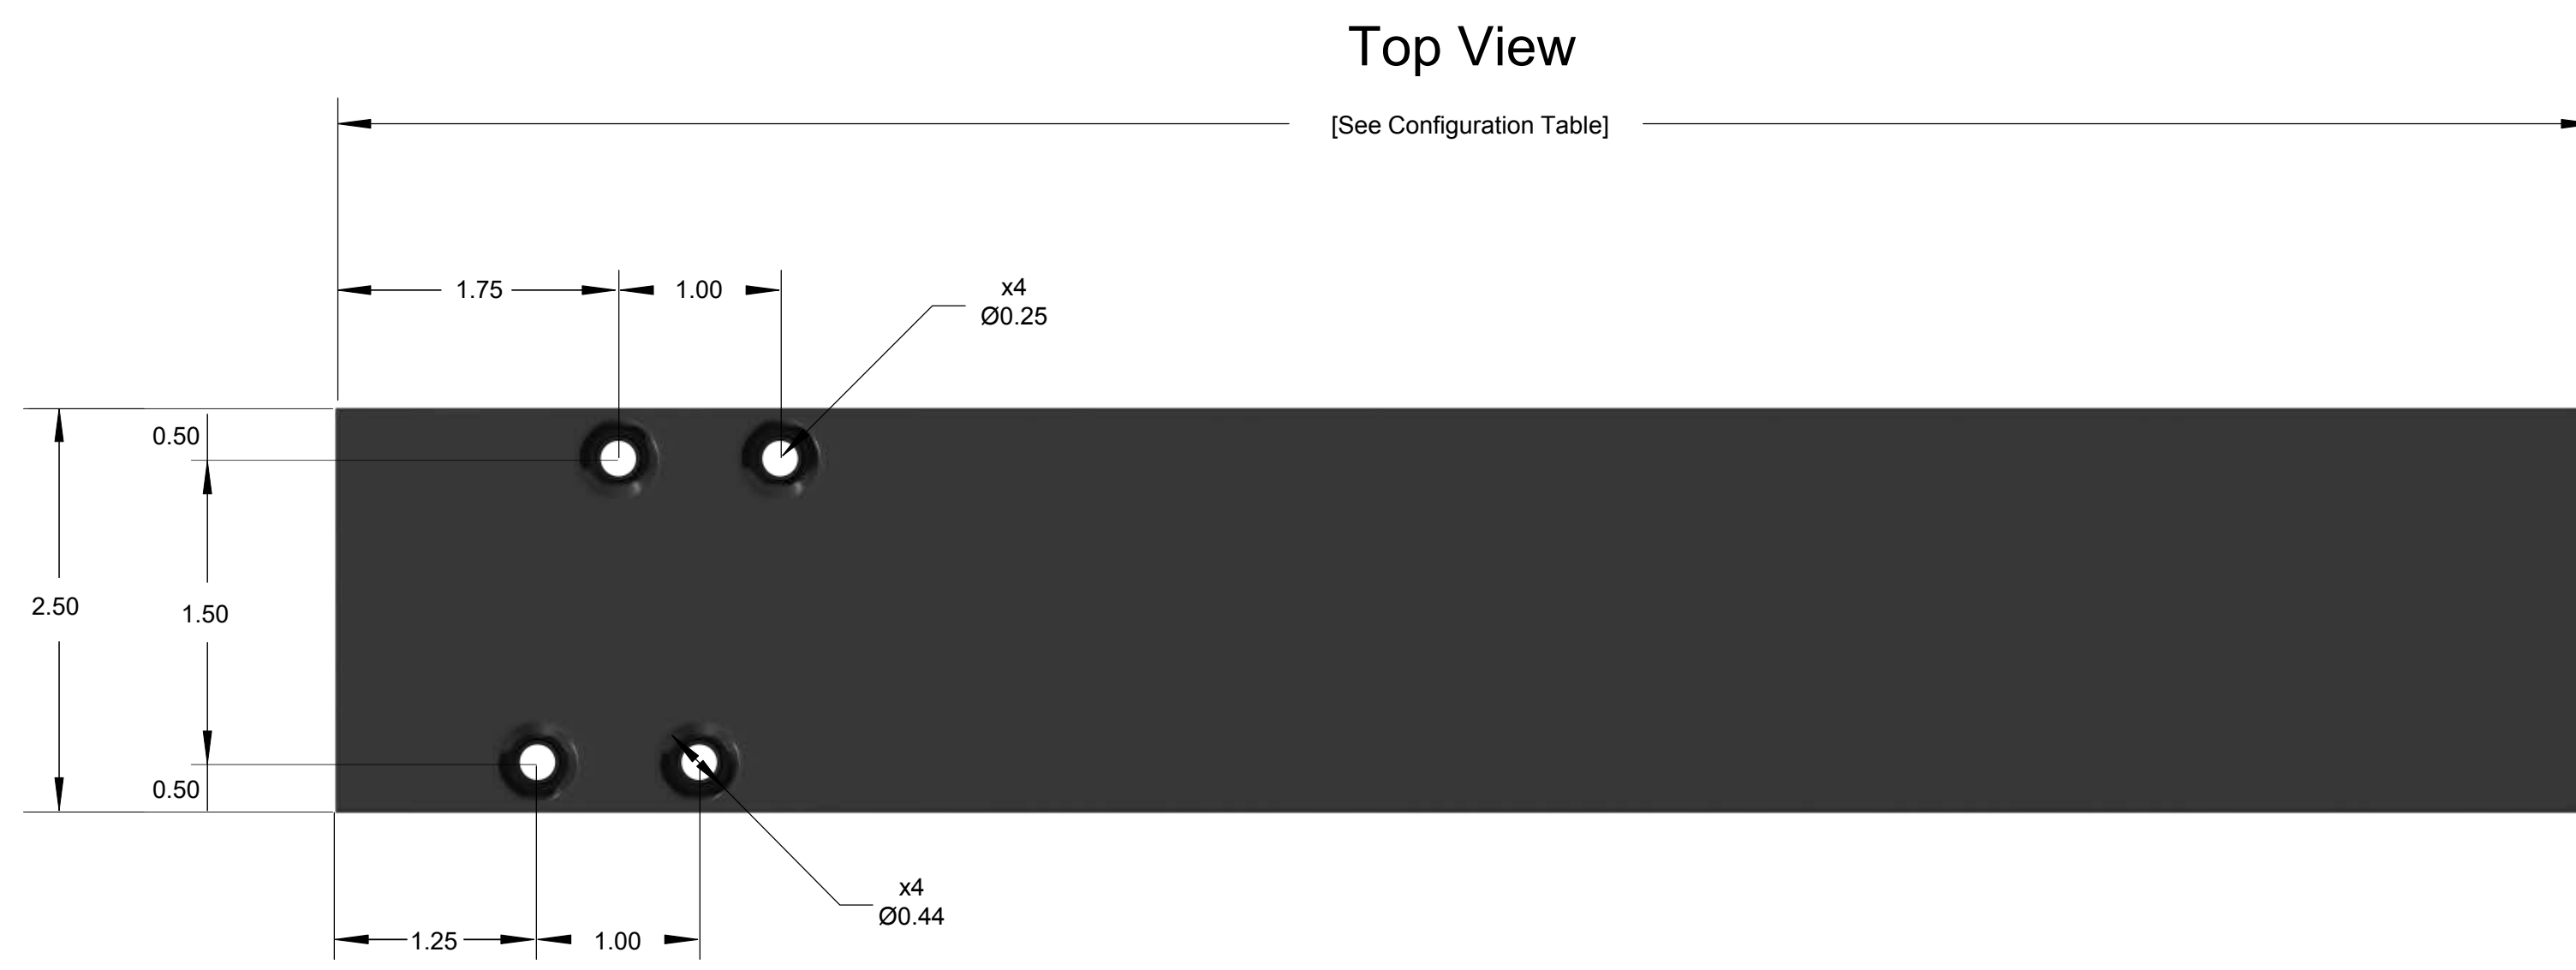
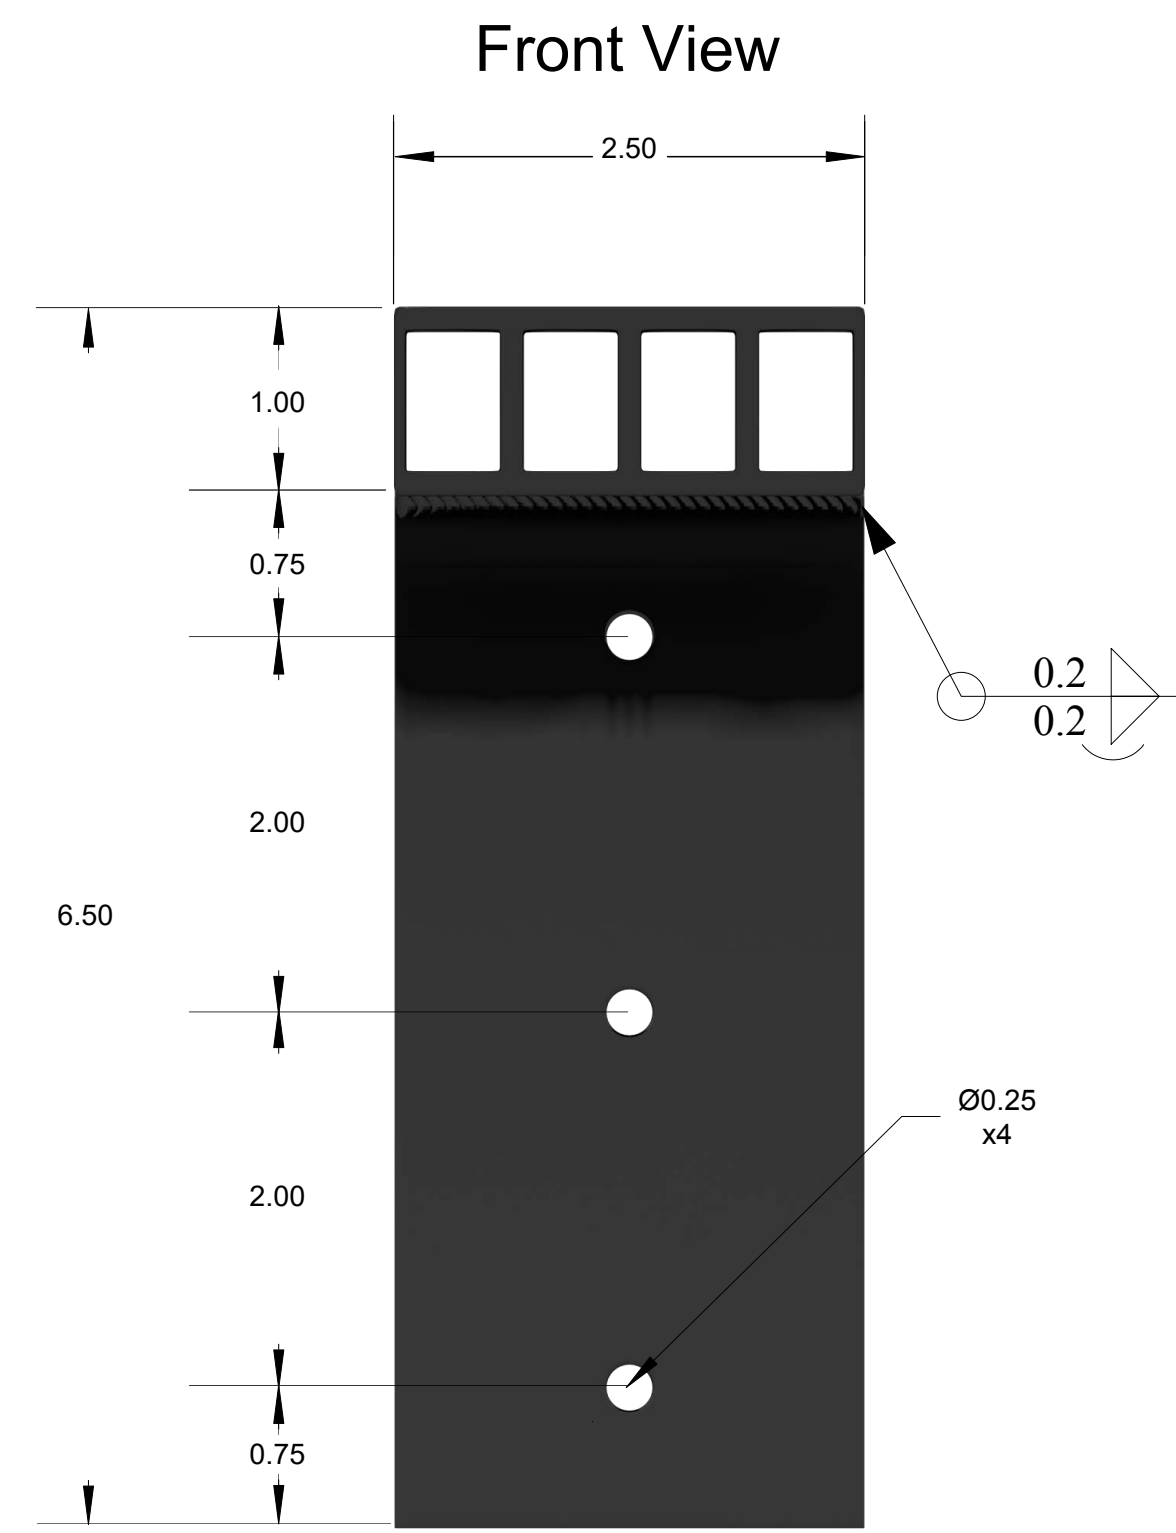



- NOTES: UNLESS OTHERWISE SPECIFIED
1. ALL DIMENSIONS ARE THEORETICALLY SHARP.
 2. REMOVE BURRS AND BREAK ALL SHARP EDGES .03 MAX.
 3. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE STATED.
 4. PARTS SHALL BE FREE OF GREASE AND CUTTING FLUID.
 5. COATED WITH A BLACK RUST INHIBITOR FINISH.

Configuration Table	
Model	Length
ILB-20	20"
ILB-22	22"
ILB-24	24"
ILB-26	26"
ILB-28	28"
ILB-30	30"
ILB-32	32"

REVISION STATUS - EACH SHEET IS MARKED WITH ITS REVISION				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	INITIAL RELEASE	09/15/20	

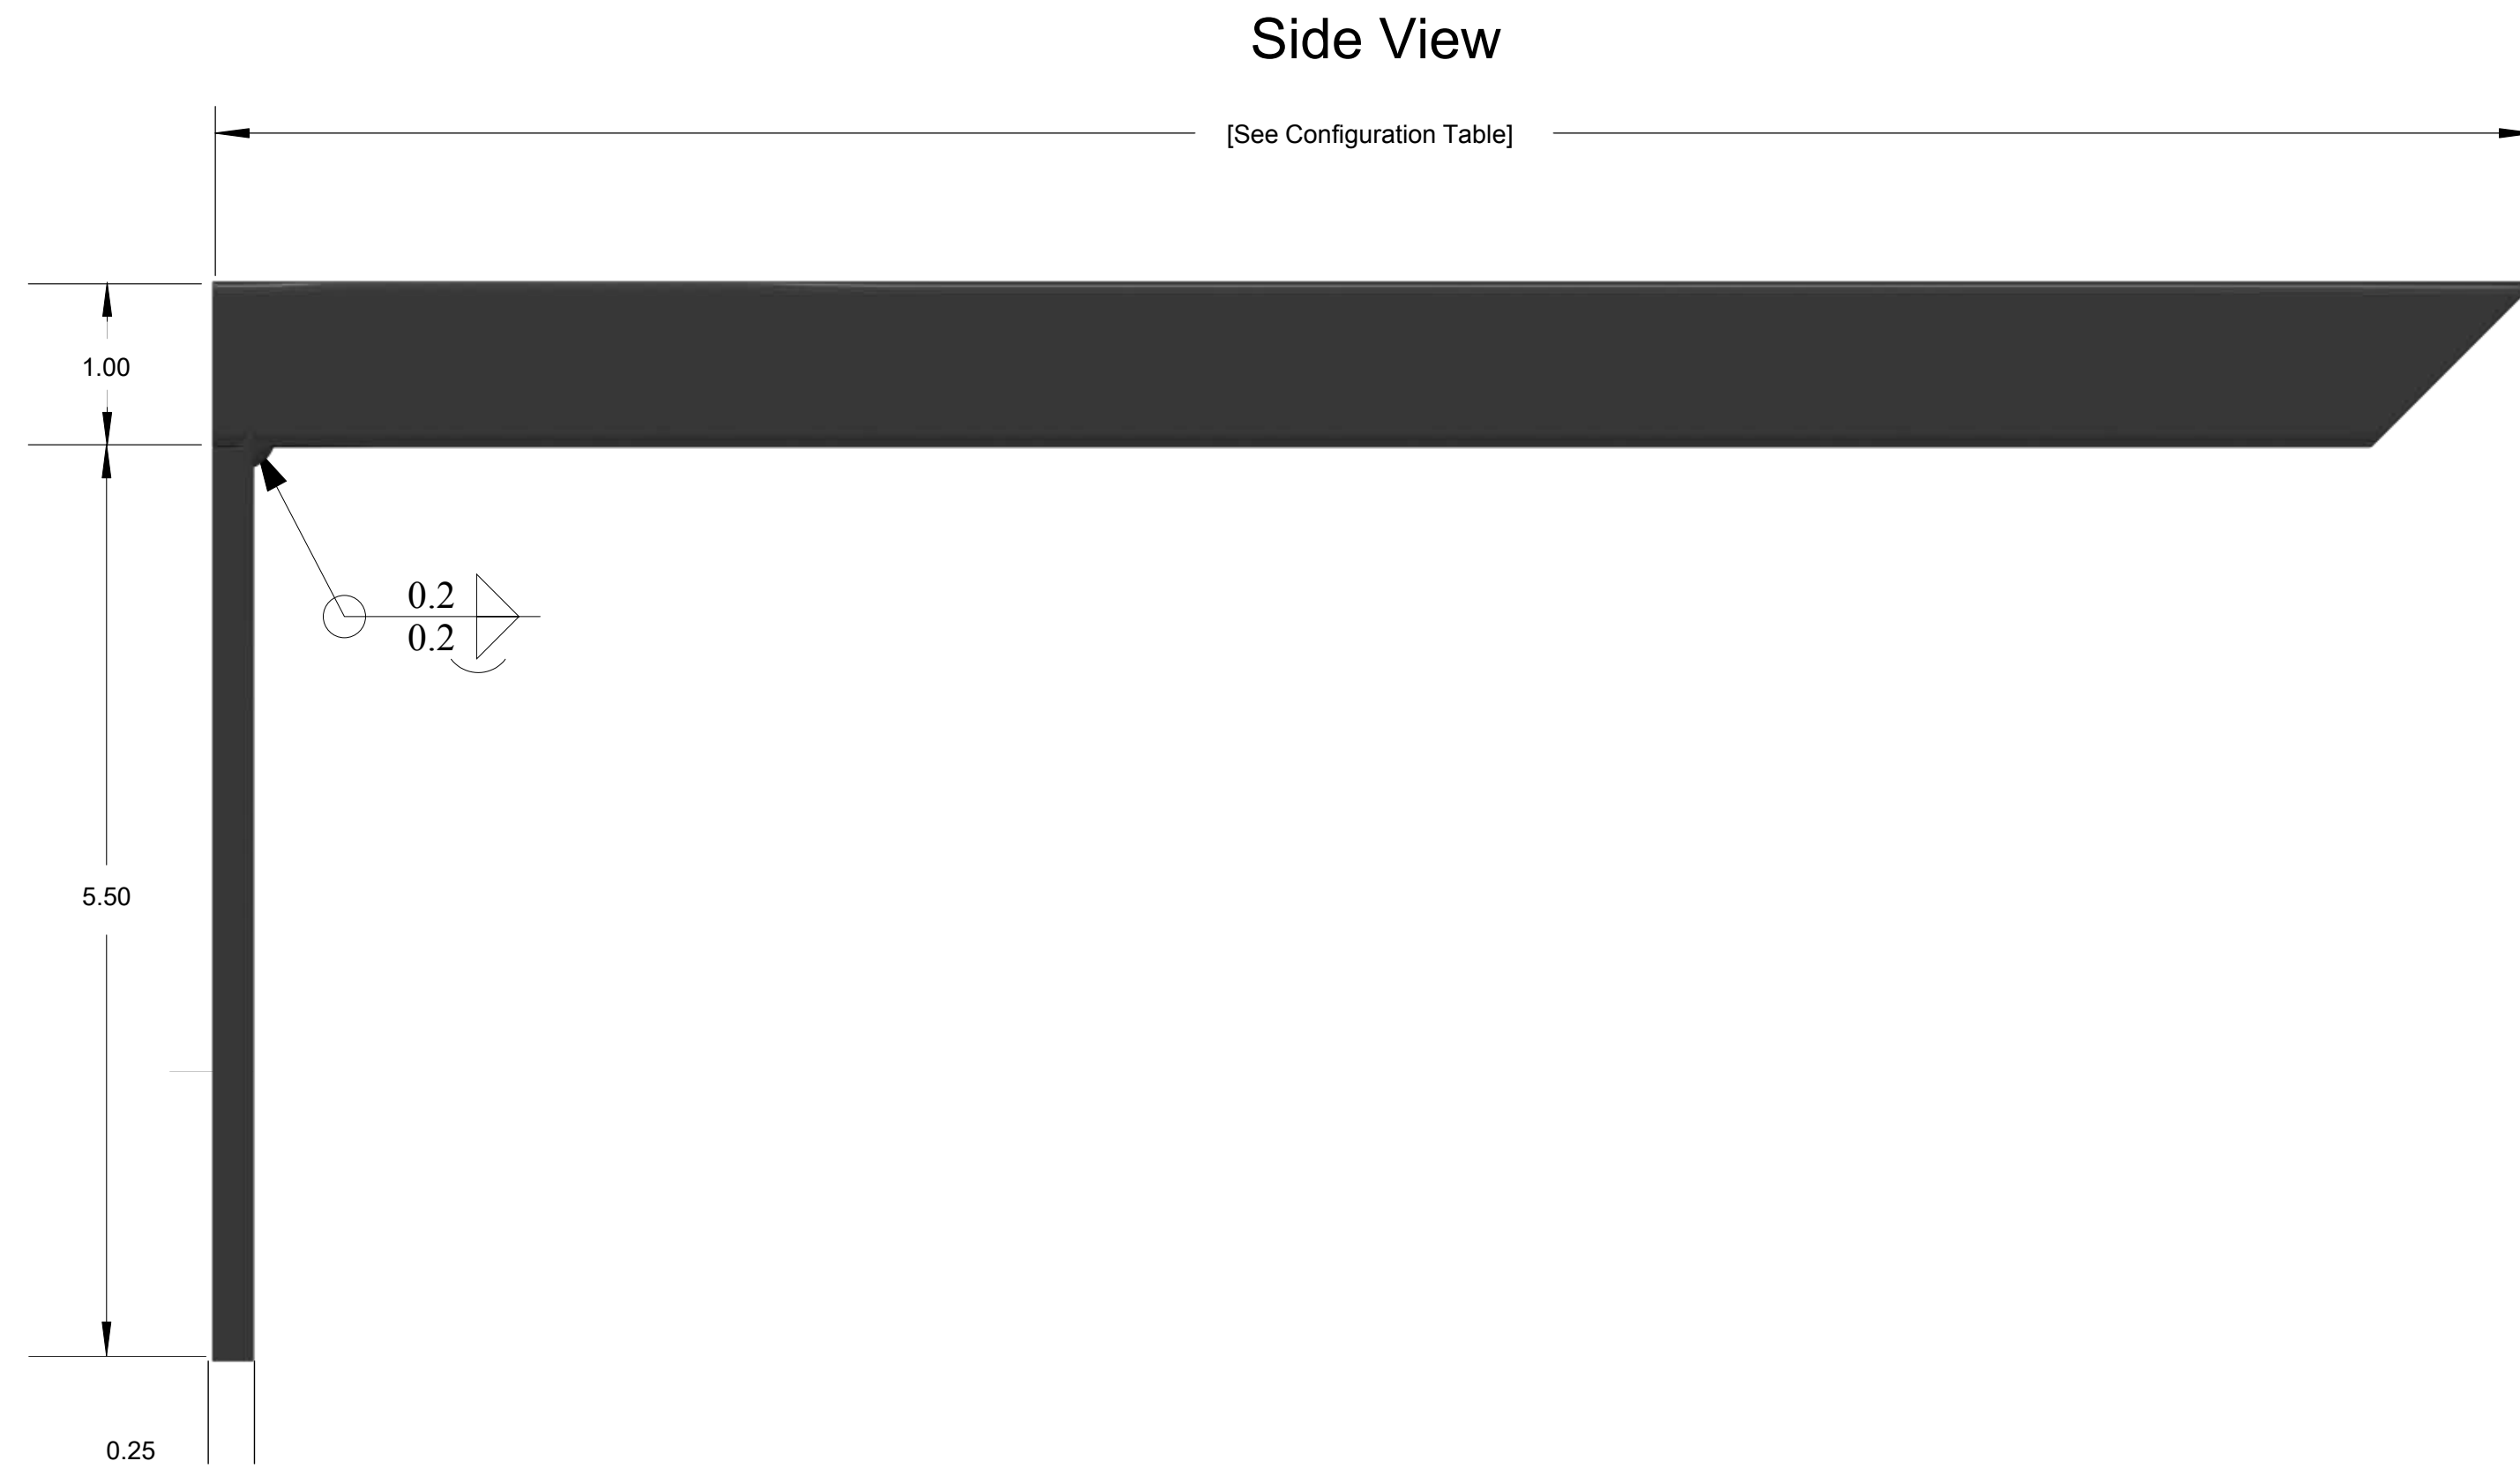

APPROVED

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	ENGINEER		
	ENGINEER		
TOLERANCES ARE:	CHECKED		TITLE
ANGLES	DRAWN	SMR	SUPPORT BRACKET, COUNTERTOP, INDUSTRIAL L BRACKET
.XX = .01 XX* = 1°	MANAGER APPROVAL		DATE
.XXX = .005			09/15/21
INTERPRET DRAWINGS IN ACCORDANCE WITH:	THE INFORMATION ON THIS DRAWING IS PROPRIETARY AND SHALL NOT BE DISCLOSED, USED OR DUPLICATED FOR PROCUREMENT OR MANUFACTURING PURPOSES WITHOUT THE EXPRESS WRITTEN CONSENT OF THE ORIGINAL GRANITE BRACKET.		SIZE
ASME Y14.100 ENGINEERING DRAWING PRACTICES			DWG NO
ASME Y14.38 ABBREVIATIONS			ILB-xx
ASME Y14.5 DIMENSIONING AND TOLERANCING			REV
ASME Y14.6 SCREW THREAD REPRESENTATION			A
AWS A24 WELDING SYMBOLS			SCALE
IEEE STD 315 SYMBOLS FOR ELECTRICAL AND ELECTRONIC DIAGRAMS			SHEET 1 of 1