



SHOCKWAVE™ 2.0 POWER SCREED

Part# SW200H | EDI# 32856



104 S. 8th Ave. | Marshalltown, IA
Phone 800-888-0127 / 641-753-0127 | Fax 800-477-6341 / 641-753-6341
www.MARSHALLTOWN.com
WS3664

TABLE OF CONTENTS

Safety Precautions	2
Warranty	3
Common Components.....	4
Installing Handle Bars & Kickstand.....	5
Attaching Blade	5
Installing Throttle Cable.....	6-7
Machine Adjustments	8
Technical Data/Capacities	9
Maintenance.....	9
Parts Breakdown.....	10-11
How to Wet Screed.....	12
How to Screed Form to Form	13
How to Operate.....	14
Operating on Wet Concrete	15

SAFETY PRECAUTIONS



- DANGER or WARNING safety signs are located near specific hazards.
- General precautions are listed on CAUTION safety signs.

This machine was built with user safety in mind; however, it can present hazards if improperly operated and serviced. Follow operating instructions carefully and use good judgement when operating!

If you have questions about operating or servicing this equipment, please contact your MARSHALLTOWN distributor or MARSHALLTOWN at 800-888-0127 or 641-753-0127.

ALWAYS

- Always stop engine between loads of concrete
- Always screed while walking backwards
- Always clearly mark and be aware of all grade pins, form stakes or other trip hazards
- Always follow all safety warnings and labels of the engine manufacturer
- Always read and understand the owners manual of the engine manufacturer
- Always wear approved hearing, eye and breathing protection
- Always use form oil to coat blade or other parts susceptible to concrete build up (avoiding electrical connections) before each use
- Always properly secure screed before transporting
- Always follow recommended maintenance schedules
- Always make sure all connections and fasteners are tight before every use
- Always always make sure engine is in "OFF" position when servicing or not in use
- Always use in a well ventilated area
- Always keep Shockwave™ 2.0 engine manual handy on the job site
- Always replace parts as they become damaged or worn

NEVER

- Never operate screed without all parts and safety covers correctly attached
- Never allow children to operate
- Never operate under the influence of drugs or alcohol
- Never use screed for anything other than its intended purpose
- Never allow engine to run unattended or idle on top of wet concrete
- Never place concrete higher than the leading "curl edge" of the blade
- Never fill gas tank while engine is running
- Never start engine near spilled fuel
- Never fill gas tank, operate, or service screed near open flame
- Never use parts or blades from other manufacturers
- Never service a hot engine
- Never operate without proper training
- Never spray water or other liquid on a hot engine

12 MONTH WARRANTY

This product is warranted to the original purchaser only to be free of defects in material and workmanship, under normal use and servicing, for a period of 12 months from the purchase date, excluding the engine. Warranty on the engine is limited to the warranty extended by the engine manufacturer and any warranty claims related to the engine should be directed to the engine manufacturer. MARSHALLTOWN's sole obligation under this warranty is limited to the replacement or repair of the product or covered part(s) at no charge delivered to you F.O.B standard ground rates from its designated facility if the product is determined upon inspection by MARSHALLTOWN to have been defective in materials or workmanship. MARSHALLTOWN's warranty for replacement parts will extend for the duration of the original product warranty.

This warranty will not apply when the product becomes damaged or inoperative due to misuse, abuse, normal wear and tear, neglect, improper maintenance, accident, or freight damage; if the product has not been operated and maintained in accordance with the instructions furnished in the Operator's Manual; or when the product has been altered or modified without approval from MARSHALLTOWN.

Under no circumstances shall MARSHALLTOWN be responsible or liable for any consequential, special, or punitive damages, pickup and delivery of the unit, inbound shipping charges to MARSHALLTOWN's service facility, rental charges for a replacement unit, loss of income, or other loss resulting from the failure of the product to function properly because of a defect in material or workmanship covered under this warranty.


There are no warranties which extend beyond the description of this warranty. No employee or agent of MARSHALLTOWN has the authority to modify this warranty.

If you wish to make a warranty claim, contact Customer Service at 1-800-888-0127 for return authorization and instructions.

THE FOREGOING LIMITED WARRANTIES ARE EXCLUSIVE AND ARE GIVEN AND ACCEPTED IN LIEU OF ANY AND ALL OTHER WARRANTIES EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, AND ALL OTHER REMEDIES. MARSHALLTOWN'S TOTAL LIABILITY ARISING OUT OF SUPPLYING AND THE USE OF THE EQUIPMENT, WHETHER BASED ON A CLAIM OF WARRANTY, NEGLIGENCE, OR OTHERWISE, SHALL NOT EXCEED THE COST PAID BY YOU FOR THE EQUIPMENT.

COMMON COMPONENTS


REF #	DESCRIPTION	REF #	DESCRIPTION
1	START/STOP SWITCH	11	DRIVE SHAFT
2	ENGINE	12	VIBRATION DAMPENERS
3	RECOIL STARTER	13	BLADE
4	OIL CAP	14	ECCENTRIC WEIGHT COVER
5	GAS CAP	15	FRAME
6	THROTTLE LEVER	16	LIFTING BAR
7	HANDLE BAR MOUNTING BLOCKS	17	TACHOMETER/HOUR METER
8	HANDLE BARS	18	BOARD MOUNTING PLATE
9	ADJUSTABLE HAND GRIPS	19	THROTTLE CABLE (NOT PICTURED)
10	KICKSTAND	20	AIR FILTER

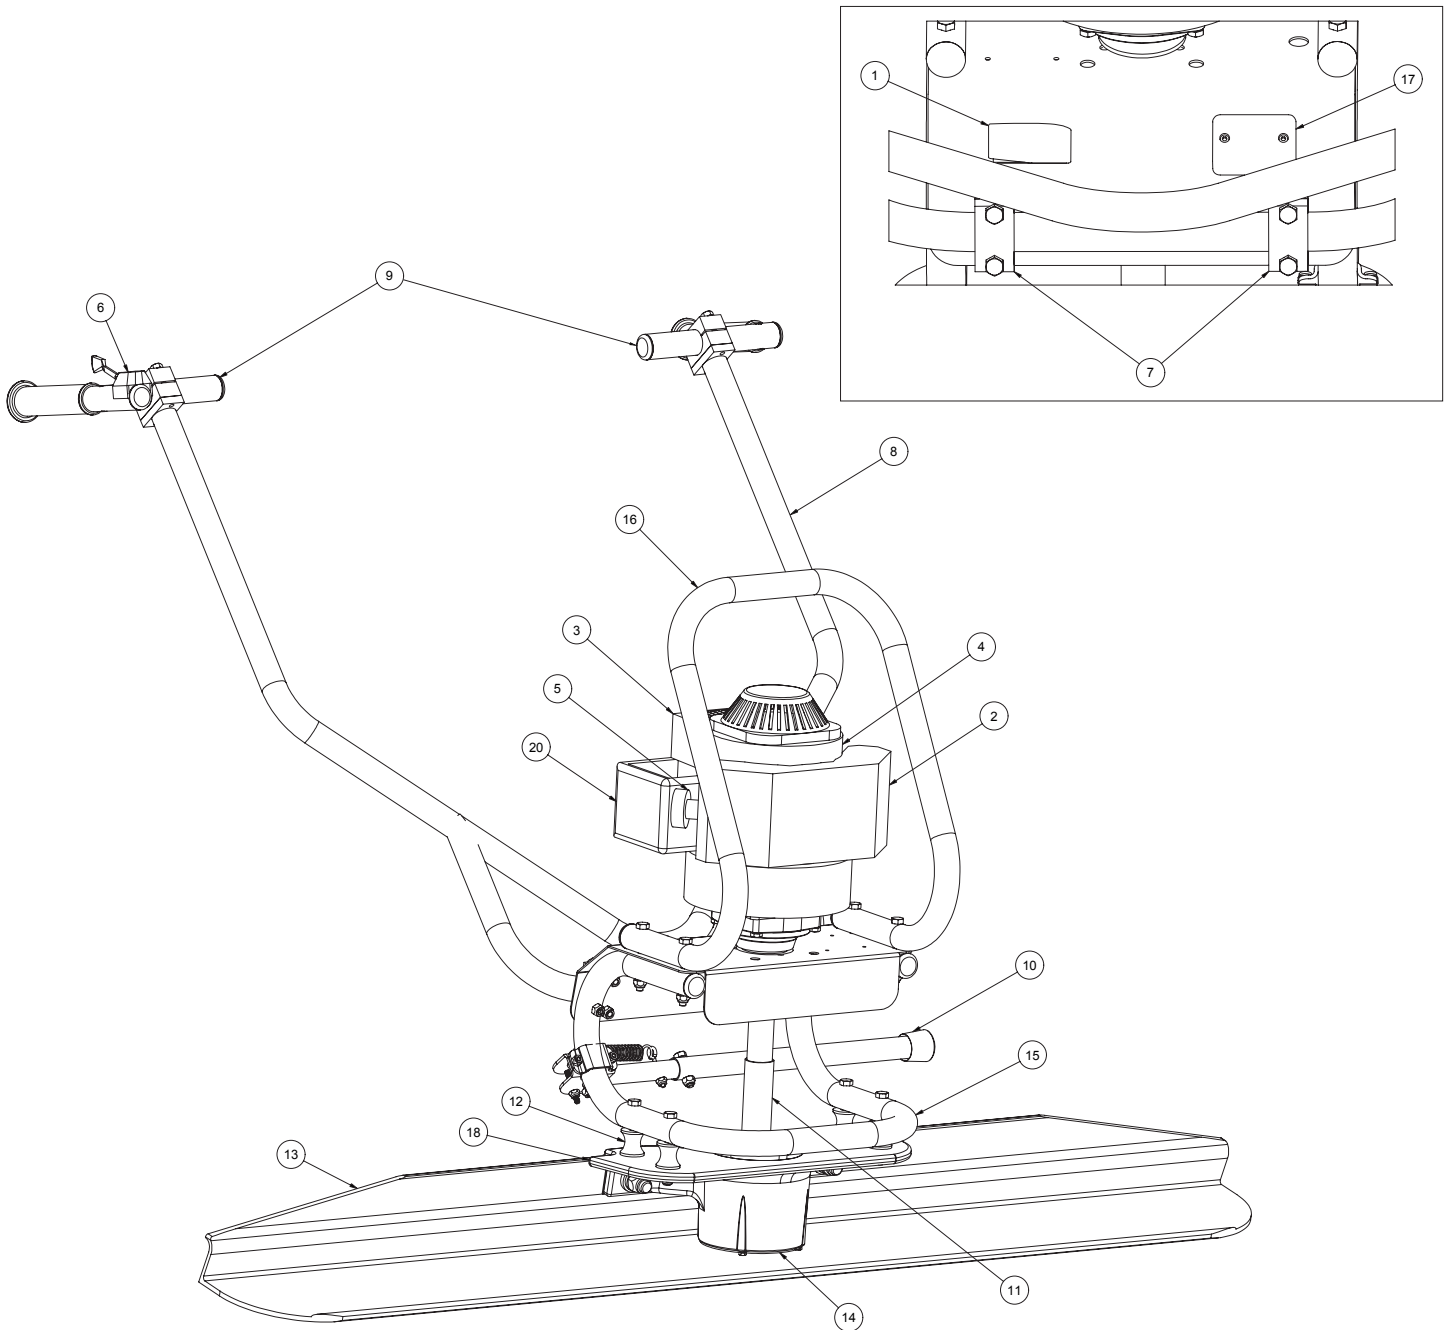

ASSEMBLY INSTRUCTIONS

Assembly is easy, following these steps:

INSTALLING HANDLE BARS AND KICKSTAND

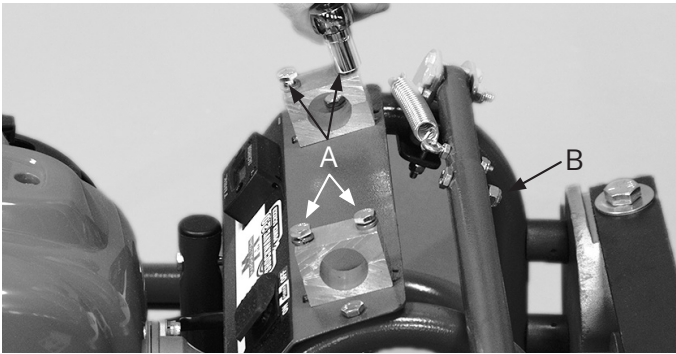

Step 1 – Remove the 4 hex screws (A) that hold down the two handle mounting blocks.

Step 2 – Slide kickstand arm onto kickstand end and fasten with nut & bolt (B) as shown.




Step 3 – Place handle bars into mounting blocks, making sure handle bars are centered evenly across the mounting blocks.






Step 4 – Making sure all mounting block and frame holes are aligned, insert hex screws and tighten with $\frac{7}{16}$ " wrench or socket.

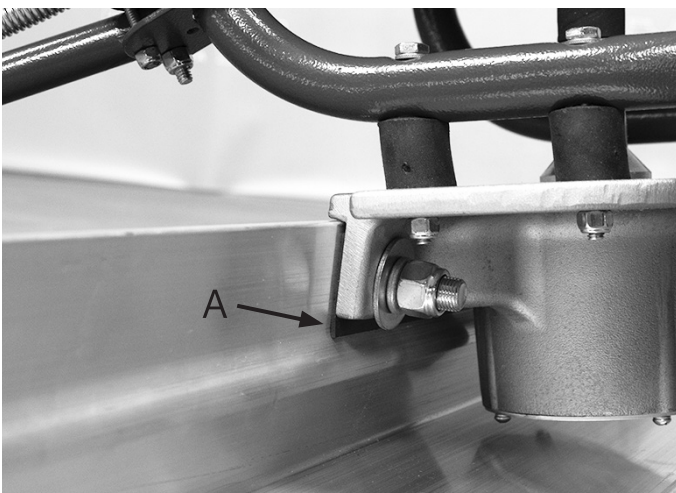ATTACHING BLADE

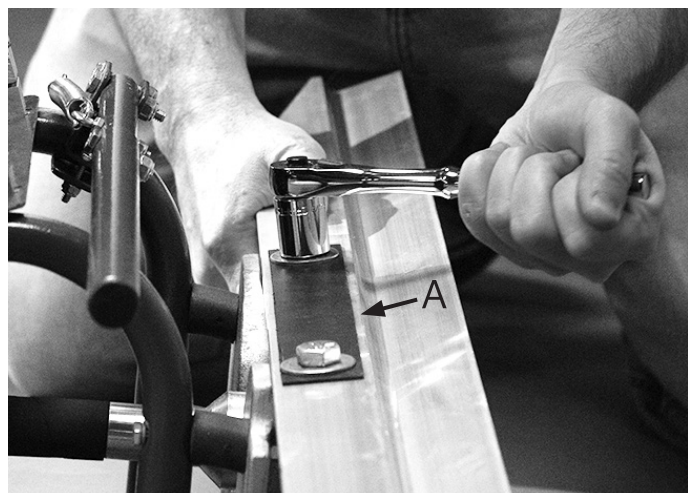

Attach blade as shown, making sure the blade is positioned on the "back side" of the base casting with blade spacers (A) on both sides of the blade.




 **Make sure bolts are tight before each use.** 


INSTALLING THROTTLE CABLE



Step 1 – Remove carburetor cover by pressing clips.

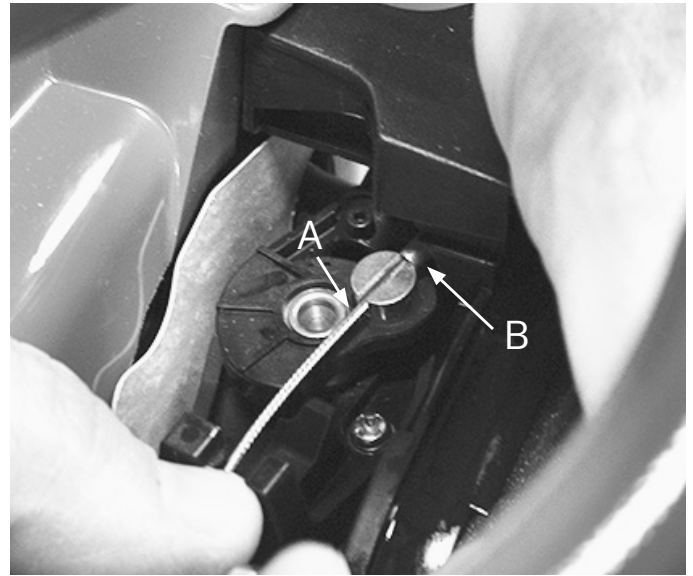

Step 2 – The throttle has a rotating silver peg (A) with a slot on one side of it. One end of the throttle cable has a metal barrel (B) that fits into this slot. Insert barrel into the slot so when the throttle cable is pulled, it will pull the throttle open (toward the base plate of the screed).

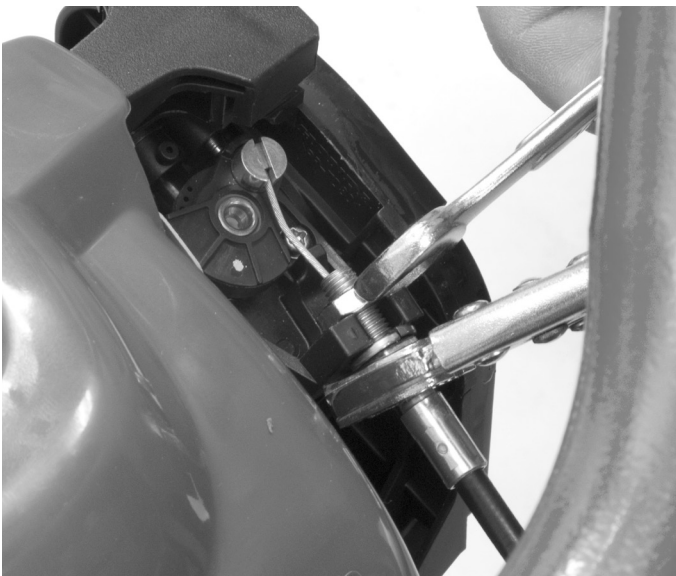

Step 3 – Fasten the throttle cable as shown. Make sure there is a nut on each side of plastic fitting. Make sure the cable does not work itself out of the plastic fitting while tightening.




Step 4 – Attach the throttle lever to the “T” grip handle, as shown above.

INSTALLING THROTTLE CABLE



Step 5 – Thread the exposed metal end of the throttle cable into the throttle lever. The lever will need to be “opened” to expose the hole it fits into. Back out the set screw to allow the cable to pass through.

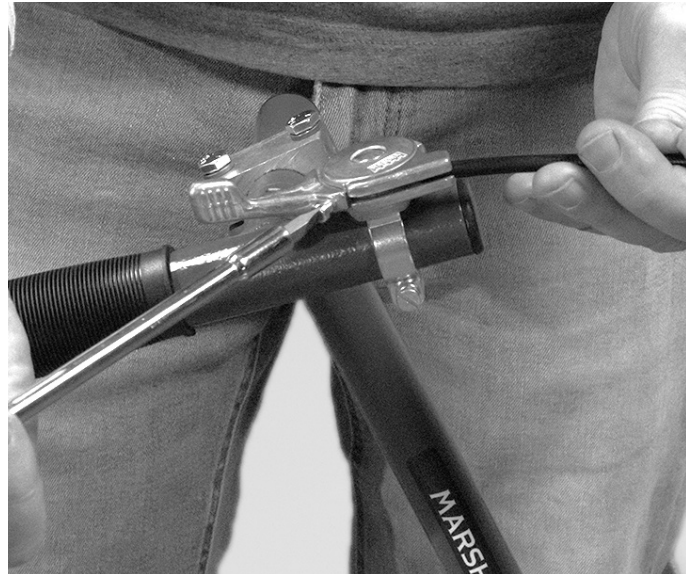

Step 6 - Once cable is through throttle lever, return the lever to the “idle” position shown above. Using pliers, pull all extra slack out of the cable, making sure you are not actually opening the throttle at the carburetor. Once all slack is removed, tighten locking screw.

NOTE: the plastic housing of the throttle cable will fit up into the throttle cable housing.



Step 7 – Secure throttle cable using clips, as shown above.


MACHINE ADJUSTMENTS



HANDLES

Your Shockwave™ 2.0 screed has handles that can be adjusted for a customized fit.

The height of the handle can be adjusted right below the motor.

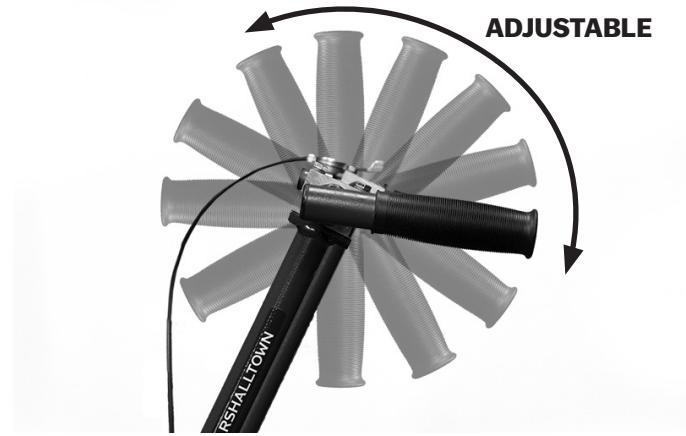

GRIPS

The grips can also be moved to accommodate wider and narrower grips, as well as flipped to the inside of the machine for an even narrower grip.

The pitch of the grips can be adjusted 360° vertically.



CAUTION

Always make sure engine is stopped with switch in "OFF" position before making adjustments.



TECHNICAL DATA/CAPACITIES

Model Number	SW200H
Drive System	Flexible Shaft
Weight	31.5 lbs. (14.3 kg)
Blade Lengths	4, 4.5, 6, 8, 10, 12, 14, 16' 1.2, 1.8, 2.4, 3, 3.7, 4.3, 4.9 M
Blade Weight	1.85 lb./ft. 2.75 (kg/m)
Engine Type	4-stroke, overhead cam, single cylinder
Engine Make	Honda
Engine Model	GX35
Engine Horsepower	1.6 hp (1.2 kW) @ 7,000 RPM
Engine Displacement	2.18 cu-in (35.8 cm ³)
Spark Plug	CM5H (NGK) CMR5H (NGK)
Spark Plug Gap	0.60 - 0.70 mm (0.024 - 0.028 in)
Engine Speed - Idle	3,100 ± 200 RPM
Oil Type - Engine	SAE 10W-30 (refer to engine manual)
Oil Capacity - Engine	0.11 qt (3.5 oz., 0.10 L)
Fuel Type	Pump octane rating 86 or higher (refer to engine manual)
Fuel Tank Capacity	0.166 US gal (0.63 L)

CAUTION




**Your Shockwave™ 2.0 ships with a pre-measured bottle of oil (3.5 oz).
Do not at anytime have more than 3.5 oz. of oil in the engine. Too much oil will foul
out the spark plug resulting in an engine that is hard to start and keep running.**



MAINTENANCE

Check and retighten eccentric weights	Every 10 hours or every month
Check oil level	Before each use
Change engine oil	First month or 10 hrs. - 6 mo. or 50 hrs after
Check fuel level	Before each use
Inspect air filter	Before each use
Replace air filter	Every 25 hours or every 3 months
Spark plug - check and adjust	Every 100 hours or 1 year
Spark plug - replace	Every 300 hours or 2 years
Cooling fins	Every 50 hours
Electronic connections	Before each use

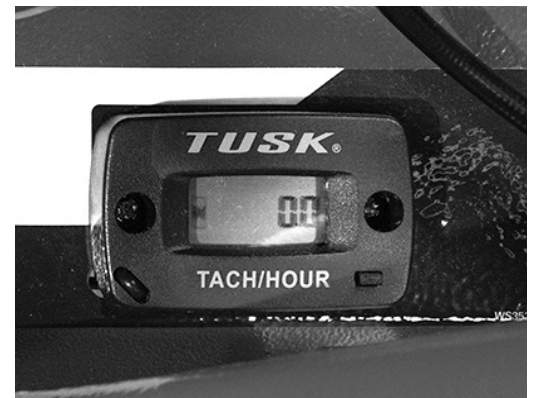

The Shockwave™ 2.0's hour meter is a great way to keep track of maintenance schedules and track service life.

PARTS BREAKDOWN

DET.	QTY.	DESCRIPTION
1	1	GX35 HONDA MOTOR
2	8	HANDLEBAR CLAMP
3	1	HANDLEBAR ASSEMBLY
4	1	MACHINE BASE
5	1	HOUR METER
6	1	ON/OFF SWITCH
7	4	VIBRATION ISOLATOR
8	1	ECCENTRIC WEIGHT
9	1	LOCK WASHER
10	1	ECCENTRIC SHAFT
11	1	ECCENTRIC TIGHTENING CAP BOLT
12	1	WEIGHT TIGHTENING CAP
13	1	LOWER BEARING HOUSING
14	1	COUPLING DRIVE SHAFT
15	1	DRIVE SHAFT (NOT PICTURED)
16	1	CLUTCH
17	1	HANDLEBARS, L-GRIP
18	1	HANDLEBARS, T-GRIP
19	2	BLADE MOUNTING LOCKNUT
20	1	BLADE
21	1	KICKSTAND END
22	1	KICKSTAND ARM
23	2	KICKSTAND EYEBOLT
24	1	KICKSTAND BUMPER
25	1	EXTENSION SPRING
26	1	UPPER FRAME
27	1	LOWER FRAME
28	1	ENGINE MOUNTING PLATE
29	1	ECCENTRIC COVER CAP
30	3	DRIVETRAIN MOUNTING BOLT
31	1	ECCENTRIC WEIGHT LOCKNUT
32	2	BLADE MOUNTING BOLT
33	4	ECCENTRIC SCREW CAP
34	2	KICKSTAND BRACKET MOUNTING BOLT
35	4	FRAME MOUNTING BOLT
36	16	¼" -20 BOLT
37	16	¼" -20 LOCKNUT
38	4	CAP PLUG (NOT PICTURED)
39	1	KICKSTAND BRACKET, REAR
40	1	KICKSTAND BRACKET, FRONT
41	5	#10-24 LOCKNUT
42	4	BLADE MOUNTING WASHER
43	2	BLADE MOUNTING LOCK WASHER
44	4	ENGINE MOUNTING SCREW
45	2	TACHOMETER MOUNTING SCREW
46	1	THROTTLE LEVER
47	2	HANDLEBAR GRIP
48	2	BLADE SPACER
49	1	KICKSTAND STOP BOLT
50	1	THROTTLE CABLE (NOT PICTURED)
51	1	ON/OFF SWITCH WIRES (NOT PICTURED)


REPLACEMENT PARTS INDEX

EDI	PART#	DESCRIPTION	DETAILS INCLUDED
13308	13308	HANDLES WITH GRIPS	17, 18, 47
13309	13309	GRIPS	47
13310	ENG-HONDA	HONDA ENGINE	1, 44
13312	13312	THROTTLE LEVER	46
13313	13313	THROTTLE CABLE	50
13314	13314	HANDLEBARS	3
13315	13315	HANDLEBAR CLAMPS W/HARDWARE	2, 36
13316	13316	HANDLEBAR CLAMP HARDWARE ONLY	36
13317	13317	ON/OFF SWITCH W/WIRES	6, 51
13318	13318	ON/OFF SWITCH WIRES	51
13319	13319	TACHOMETER	5, 45
13324	13324	CLUTCH	15, 44
13330	13330	ECCENTRIC WEIGHT & HARDWARE	8, 9, 11, 12, 31
13331	13331	ECCENTRIC WEIGHT HARDWARE ONLY	9, 11, 12, 31
13333	13333	BLADE LOCKING HARDWARE	19, 32, 42, 43
13334	13334	DRIVE SHAFT	15
32858	SW200FR	REPLACEMENT FRAME 2.0	26, 27, 28, 35, 36, 37, 38
32859	SW200MB	MACHINE BASE 2.0	4
32860	SW200VD	VIBRATION DAMPENING KIT	7, 37
32861	SW200KICK	KICKSTAND	21, 22, 23, 24, 25, 34, 36, 37, 39, 40, 41, 49
32862	SW200EC	ECCENTRIC COVER WITH HARDWARE	29, 33
13323	13323	DRIVE TRAIN	10, 13, 14, 16, 30

BLADE SIZE CHART

EDI	Part #	SIZE-FT.	SIZE-M
32403	32403	4	1.2
32404	32404	4.5	1.37
32405	32405	6	1.8
32406	32406	8	2.4
32407	32407	10	3.0
32408	32408	12	3.7
32409	32409	14	4.3
32410	32410	16	4.9
32411	32411	16	4.9


PARTS BREAKDOWN

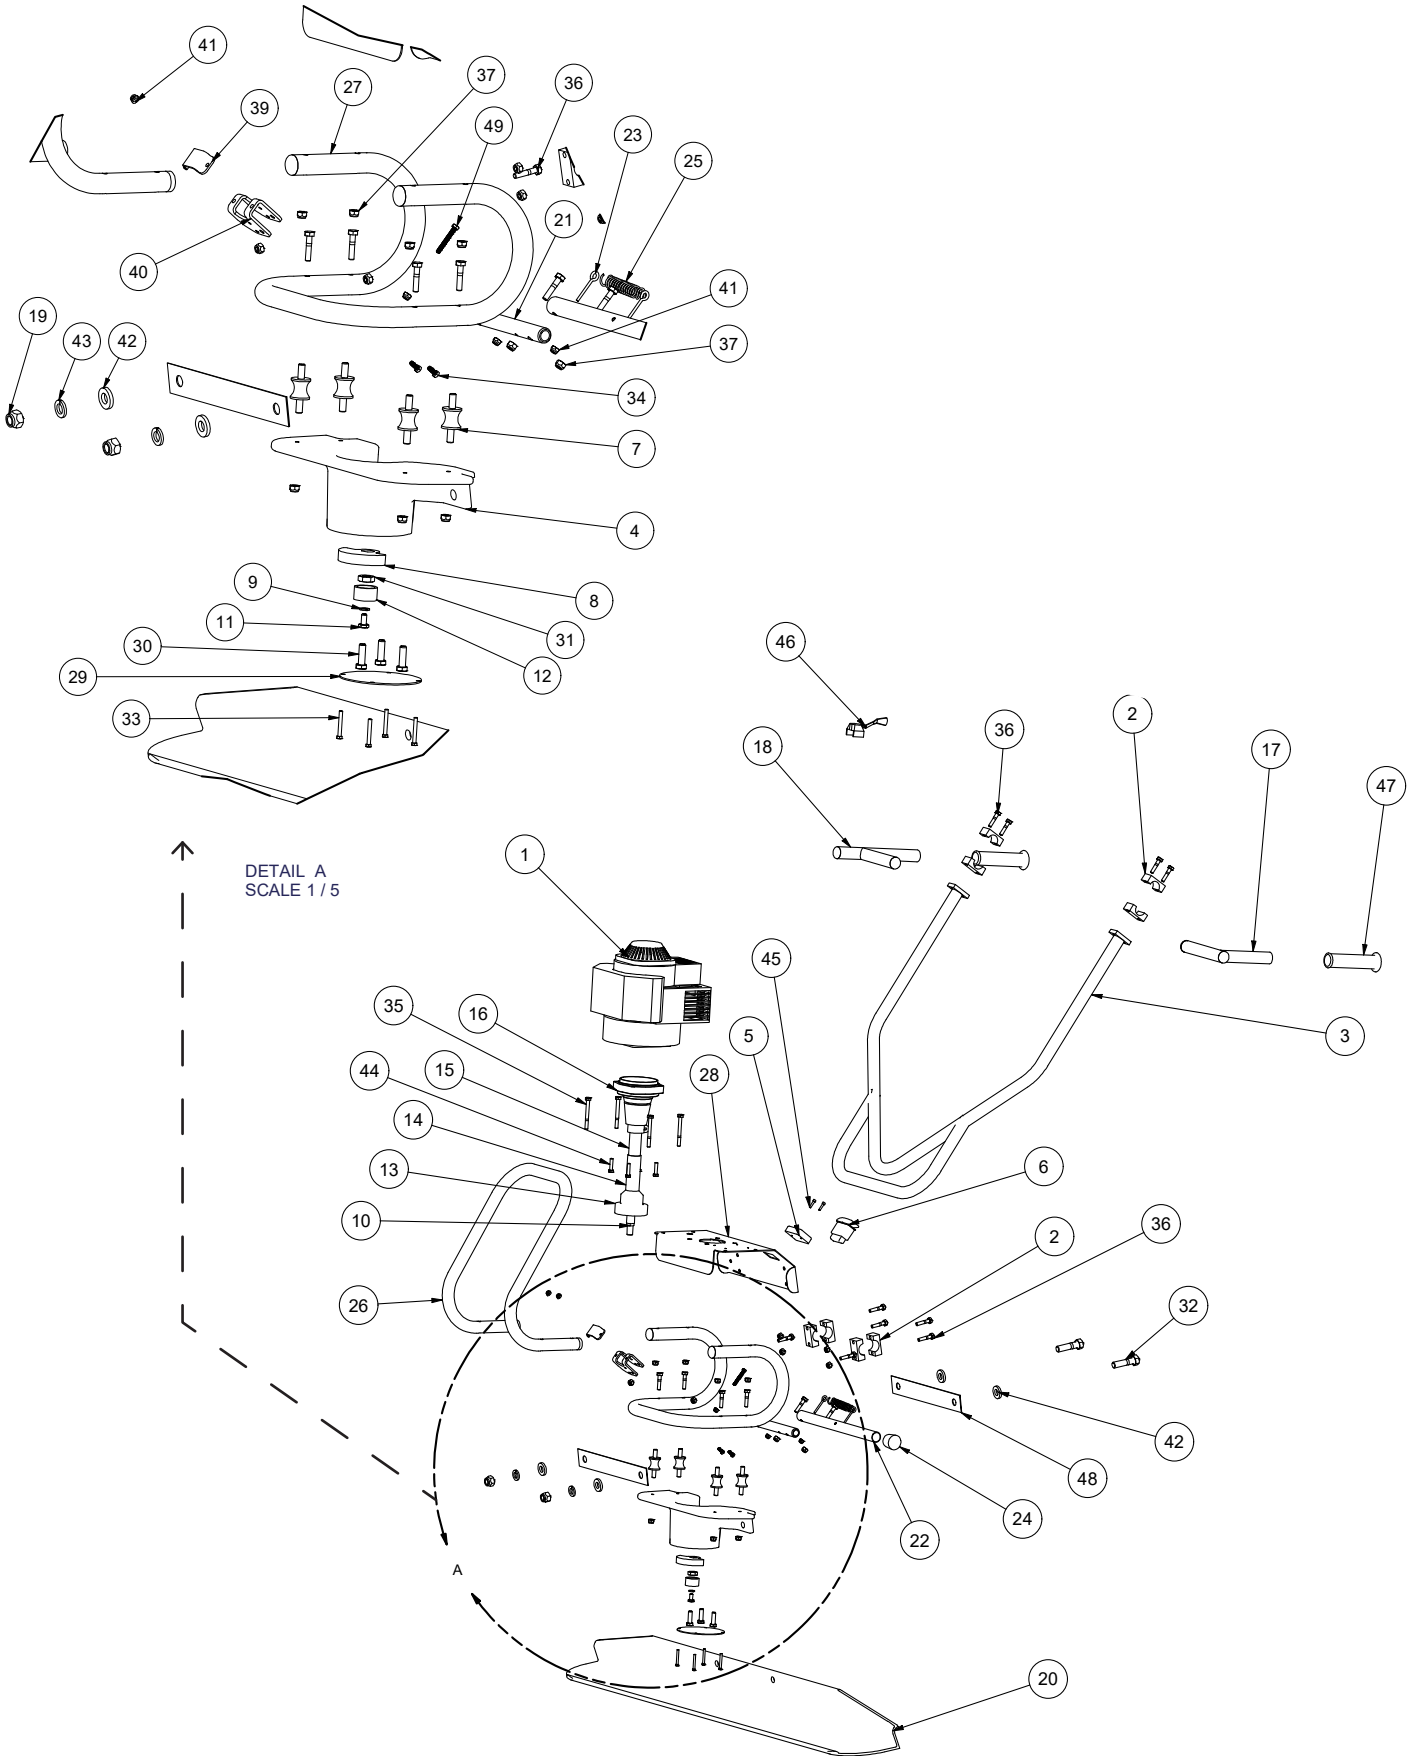

HOW TO WET SCREED

SETTING ELEVATION OF SLAB

- Use grade pins (A) to set height of slab in the middle of the pour.
- Chalk line or expansion joint sets elevation around walls.
- Form boards set elevation where there are no walls.


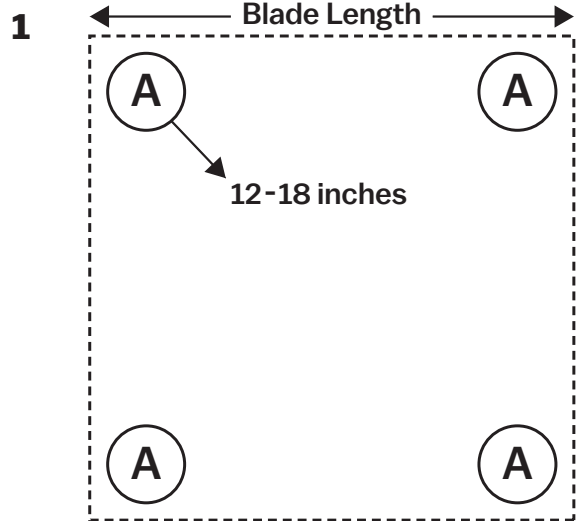


MAKING WET PADS

1. Using hand float, make wet pads around all grade pins (A).
NOTE: Make sure all wet pad distances are shorter than the length of blade being used.
2. Use blade to stretch from wet pad to wet pad forming rows (B).
3. Once rows are formed, run screed blade off of the two rows leveling the previously untouched concrete (C) in between.


NOTE: Height of concrete in area (C) must be slightly higher than wet pad rows (B) prior to striking off.

Once floated, wet pads (B) and concrete (C) will all be the same height.

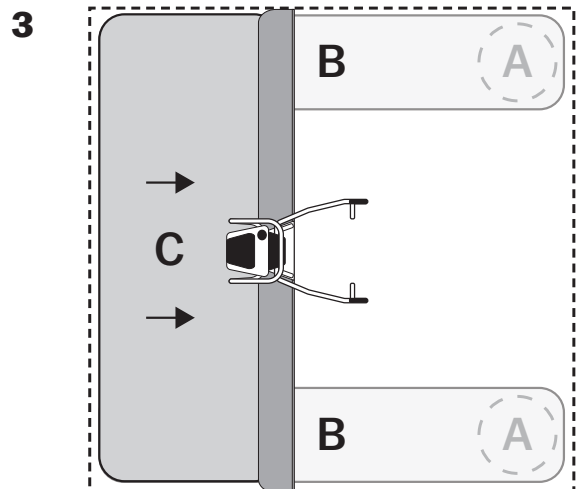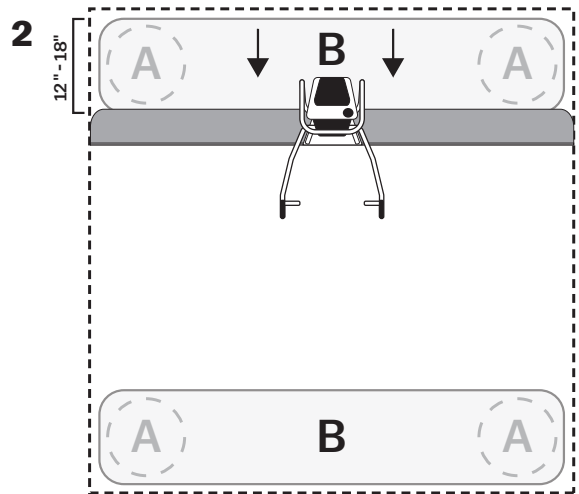


HOW TO SCREED FORM TO FORM

Length of blade should overlap form boards on both sides of the pour.

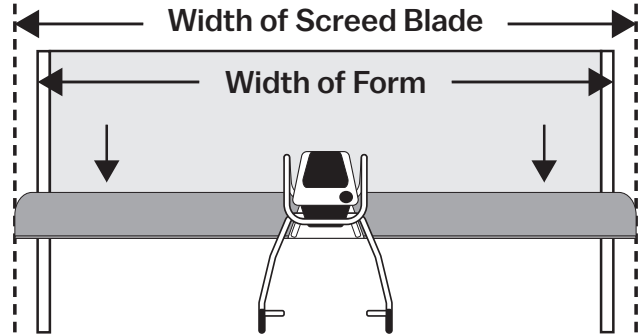


Keep bottom of blade as flat as possible while striking off of forms.


To ensure the longest possible blade life, use the lowest possible vibration setting in relationship to the slump of concrete being used.

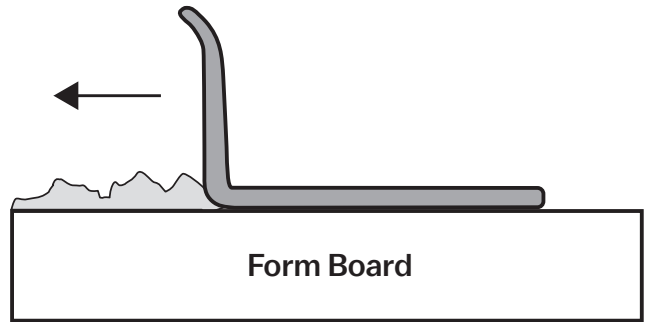

KEEP SCREED BLADE FLAT

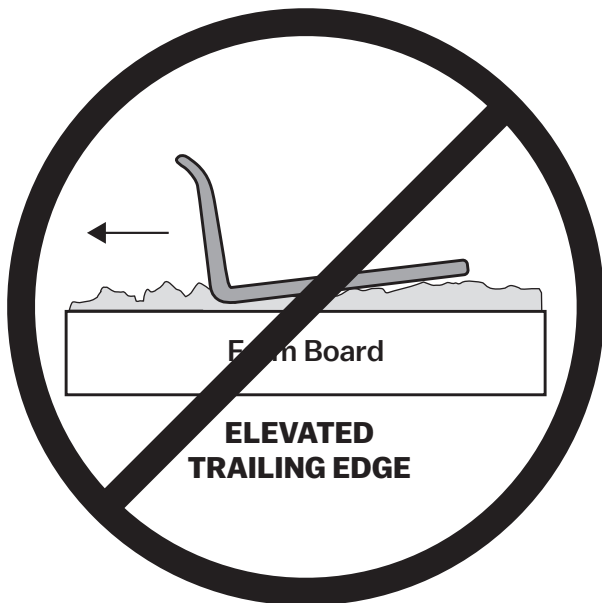

An elevated trailing edge may provide an area for concrete to build up resulting in a slab elevation that is too high.

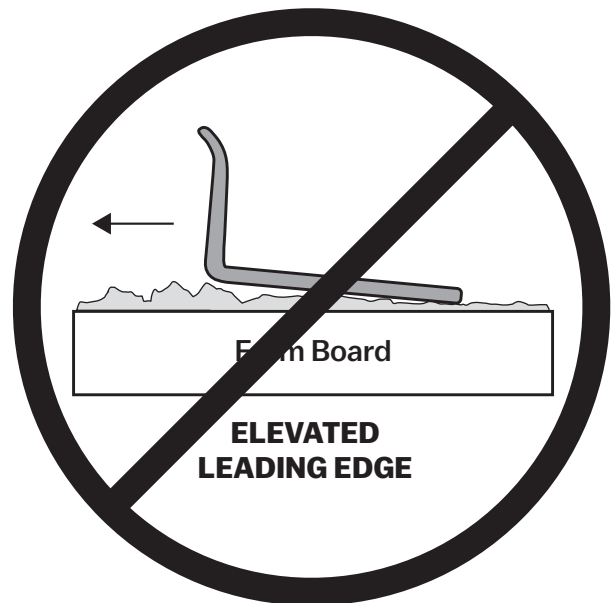

An elevated leading edge can trap rocks between the blade and forms resulting in a slab elevation that is too high.

HOW TO OPERATE

FUEL AND OIL

Make sure gas tank has plenty of 86 octane or higher gasoline. Your 4 stroke Honda engine uses straight gasoline. NEVER USE A GAS/OIL MIX. Empty entire bottle of provided Honda engine oil into crank case. The maximum oil capacity is 3.5 oz. Always lay screed down on roll cage as shown when filling gas and oil or checking oil. NEVER OVERFILL.





STARTING

1. On a cold engine, move choke lever to CLOSED position. To restart a warm engine leave choke in OPEN position
2. Press priming bulb repeatedly until fuel can be seen in the clear-plastic fuel-return tube.
3. Press On/Off Switch to the On Position.
4. Pull the starter grip lightly until you feel resistance, then pull briskly. Repeat until engine starts.
5. If the choke lever was moved to the CLOSED position to start the engine, gradually move it to the OPEN position as the engine warms up.



RESTARTING A WARM ENGINE

1. Leave the choke lever in the OPEN position.
2. If there is no fuel in the clear-plastic fuel-return tube, press priming bulb repeatedly until fuel can be seen in the tube.
3. Press On/Off Switch to the On Position
4. Pull the starter grip lightly until you feel resistance, then pull briskly. Repeat until engine starts.

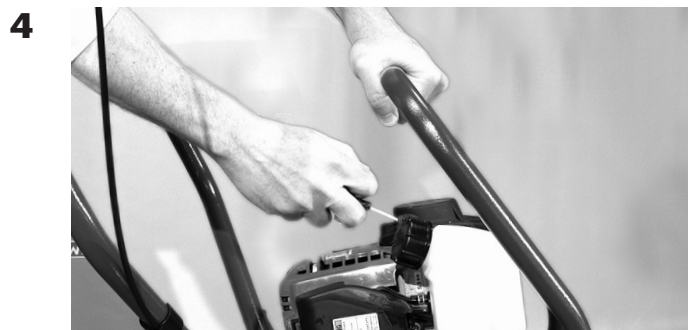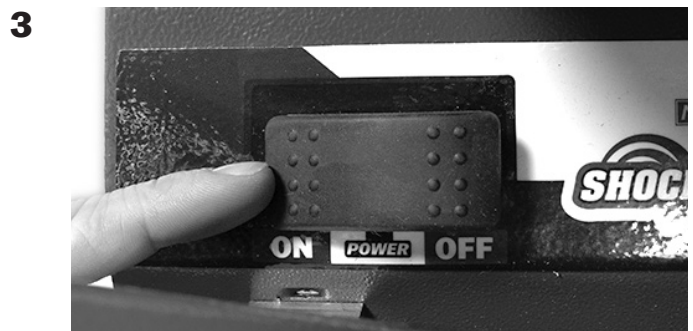

OPERATING ON WET CONCRETE

Once the engine is warm and running by itself with the choke OPEN you can begin screeding concrete.

For specific instructions on Wet Screeding and Form to Form screeding please see pages 12 and 13.

1. Begin by placing concrete within your forms slightly higher than the forms themselves.
2. Place screed on top of concrete and start engine.
3. Increase engine RPM until the clutch engages causing the screed to vibrate.
4. Walking backwards, begin screeding concrete.
5. Your throttle lever does not require constant contact, but you can adjust RPM and vibration to accommodate wet or dry concrete. Dry or low slump concrete may require more vibration to level and screed.
6. Continue moving backwards while keeping concrete placed in front of the blade. The roll back feature of the blade will help keep concrete from sliding over the blade. Concrete placed too high may slide over the board! This could make the screed too hard to pull and result in a slab that is out of level.



DO NOT OVER VIBRATE CONCRETE

The following are signs of too much vibration:



- Excessive concrete splatter
- Blade sinking below wet pads
- Ripple or “wake marks” following the blade
- Concrete easily sliding underneath form boards causing dips along the form edge



Always remember, ***the less vibration the better***. Use only enough vibration to be able to comfortably pull screed backwards, leaving a smooth, level surface.



104 S. 8th Ave., Marshalltown, IA
Phone 800-888-0127 / 641-753-0127
Fax 800-477-6341 / 641-753-6341
www.MARSHALLTOWN.com
WS3664